



CATALOGUE 2023

Professional and innovative
flow measuring & monitoring solutions

- Vortex flow meter
- Micro flow meter
- Thermal mass flow meter
- Efficiency measurement
- Pitot tube flow meter
- IoT monitoring



About Comate Intelligent Sensor

Hefei Comate Intelligent Sensor Technology Co.,Ltd (COMATE) is a world leading gas/air/steam flow measurement solution provider. Our R&D team comes from the University of Science and Technology of China and have been researching in the flow measurement technology since 2008. We are delegated to help the users on solving their measurement challenge with our origin and innovative technologies ever since.

Comate has set up a complete product line including thermal mass flow meter, vortex flow meter, micro flow meter and pitot tube flow meter. Thanks to our strong R&D force, we are able to answer to specific requirements from different industries, such as our auditing and pre-auditing set specially customized for compressed air applications, which has help thousands of compressor distributors on improving their sales of the machines.

Up to today, Comate's products has been used in over 60 countries & areas, and are welcomed by end users for their stability and durability. Our users covers different industrial sectors such as in automotive and parts manufacturing, home appliance manufacturing, optoelectronics, food, pyroelectricity, buliding materials, metallurgy, textile, printing and other industries, fully meet customer application requirements.



What's the meaning of cooperating with Comate?

- Outstanding design team, long-term R&D experience in flow meter manufacturing
- Professional ability to provide customized solution for special applications
- Comprehensive quality control and customer service system




Don't be hesitated to call us at info@comatemeter.com if you have any questions.

Our Clients & Partners

Most of our users are the leading companies from various industries around the world and we have won the recognition with our high-performance and highly reliable products.



International Exchange & Cooperation

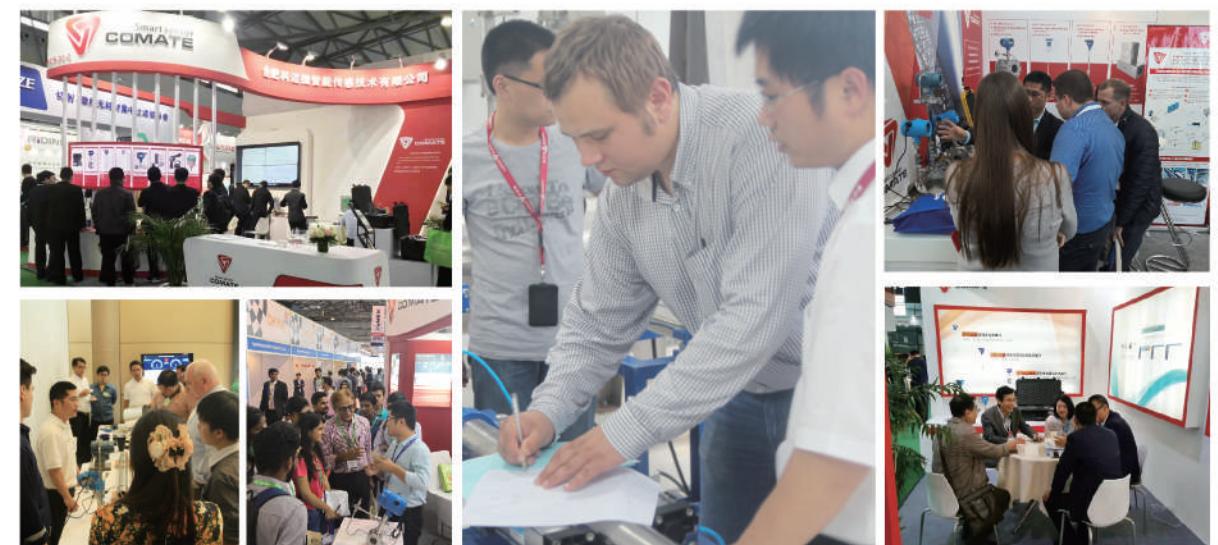

Qualification Honors



- 1 The Ministry of Science and Technology's first "Excellent Enterprise in Innovation and Entrepreneurship Competition" award
- 2 Second Prize of China Energy Conservation and Environmental Protection Patent Award
- 3 National high-tech enterprise with multiple core invention patents and software copyrights
- 4 Research Unit of 'Innovation Fund for Technology-based SMEs'
- 5 Gazella company, Technology little giant Enterprise
- 6 Five "High Tech Technology products of Anhui Province"
- 7 Passed European EMC Test

All COMATE products will be carefully calibration before delivery. Our engineers are available to assist you 7-24 if you need. Pls contact us directly if you have any questions.

Flow meter's calibration services are performed in Comate's test and calibration laboratory. we have other cooperative laboratories for other instruments. All calibration equipment can be tracked to National standard Center and recalibrated regularly.



Calibration Service

- > Accuracy 0.2%
- > Calibration Range: 0~8000m³/hr
- > Pressure 0~0.6Mpa
- > Pipe Size DN15~DN300
- > Medium: Air
- > Reference equipment: Sonic nozzle

Test on-site


- > Flow and consumption measurement
- > Pressure measurement
- > Temperature measurement
- > Leak detection
- > Days or weeks data record
- > Energy Consumption audit

Smart sensor COMATE Hefei Comate Intelligent Sensor Technology Co.,Ltd Calibration report															
Customer's Info:		Contact Person:		Report No.: 3004-02-12-2024											
Customer Name:		Contact Person:													
Customer Address:		Contact Person Tel:													
Customer E-mail:		Contact Person Email:													
Specification of tested compressor															
Model:	XXXXXXXXXX	Manufacturer:	XXXXXXXXXX	Date of production:	2023.05.05	Read power:	0.00	Specific Power:	0.00						
Rated air flow:	11.80 m ³ /min	Rated pressure:	0.60 Mpa	Rated specific Power:	0.00	Specific Power:	0.00	Volumetric:	Volumetric						
Measured air compressor parameters															
Model:	XXXXXXXXXX	Manufacturer:	XXXXXXXXXX	Date of production:	2023.05.05	Read power:	0.00	Specific Power:	0.00						
Rated air flow:	11.80 m ³ /min	Rated pressure:	0.60 Mpa	Rated specific Power:	0.00	Specific Power:	0.00	Volumetric:	Volumetric						
Test Data															
Total measured flow:	8.55 m ³ /min	Total measured consumption:	0.85 kWh	Avg:		Measured consumption per min of air:	0.1000 kWh/min								
Total flow:	2018.04.22 11:30:34	Total time:	2018.04.22 11:30:34	Time:		Measured consumption per min of air:	0.1000 kWh/min								
Results of calibration and additional explanation															
Calibration velocity:	0.3-30Nm ³ /s	Calibration media:	Air	Calibration pipe size:	80mm	Reference condition:	20°C, 101.325kPa								
Calibration point	Designed value (Nm ³ /h)	Standard value (Nm ³ /h)	Indicated value (Nm ³ /h)	Result %RD	Repeatability										
1	27.143361	27.22613	27.40715478	0.66	0.08										
2	72.382295	72.08316	72.35709407	0.38	0.16										
3	199.05131	198.9513	196.1566025	-1.40	0.21										
4	325.72033	324.7231	328.9125468	1.29	0.29										
5	506.67606	503.0803	498.2324972	-0.96	0.14										
Inspector:	Yan	Checked By:	Zhang	Approved by:	Li										
Instruction: If customer need to verify the result of this calibration under the instruction of manufacturer or that of technical regulation, please do the re-calibration before March. 15 th 2023.															
Date for Verification:	2022.03.15	Valid Until:	2023.3.15												
Address:	2nd floor, Building D2, Hefei Innovation Industrial Park, No.800 Wangjiang West Road, Hefei Tech Development Zone, Hefei, Anhui Province, China														
Fax:	0551-5316075	Tel:	0551-3653542	website: http://www.comstemeter.com											


COMATE has the Origin technology from the basis, design & manufacture all our products from hardware to software and Every COMATE product will be calibrated and preset before shipment. Data reserved in our PHM system to ensure quality traceable.

Content

Supply Chain Management

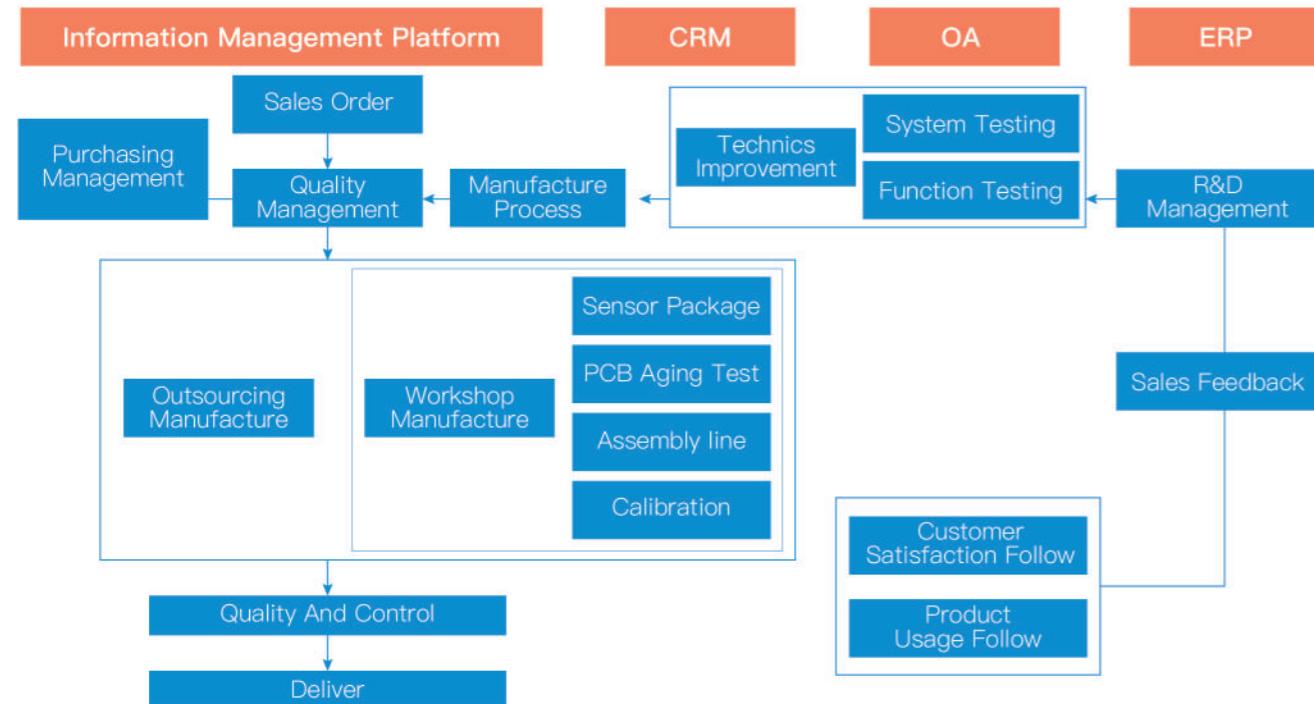


PHM—Product Healthy Management

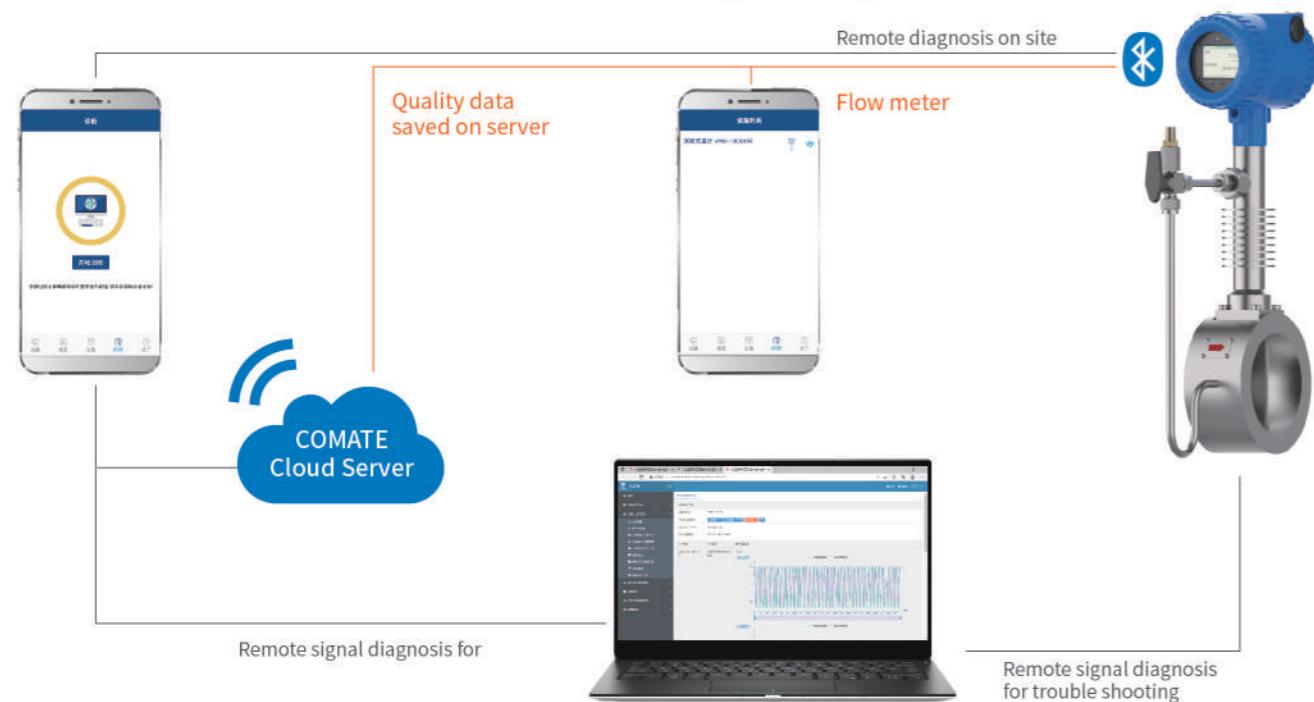

VFM80 Vortex flow meter	01
VFM60 Vortex flow meter	08
VFM55 Vortex flow sensor	14
VFM52 Vortex flow sensor	16
TGF600 Thermal mass flow meter	20
TGF460 Thermal mass flow meter	25
TGF200 Micro flow meter	29
PTF520 Pitot tube flow meter	32
PTF600 Pitot tube flow meter	36
CAE520 Compressed air networking auditing system	40
CAE350S Compressor analyzing system	42
CAE820 Compressed air network auditing system	46
COMATE APP	50
COMATE Remote support package	51

COMATE INTELLIGENT SENSOR

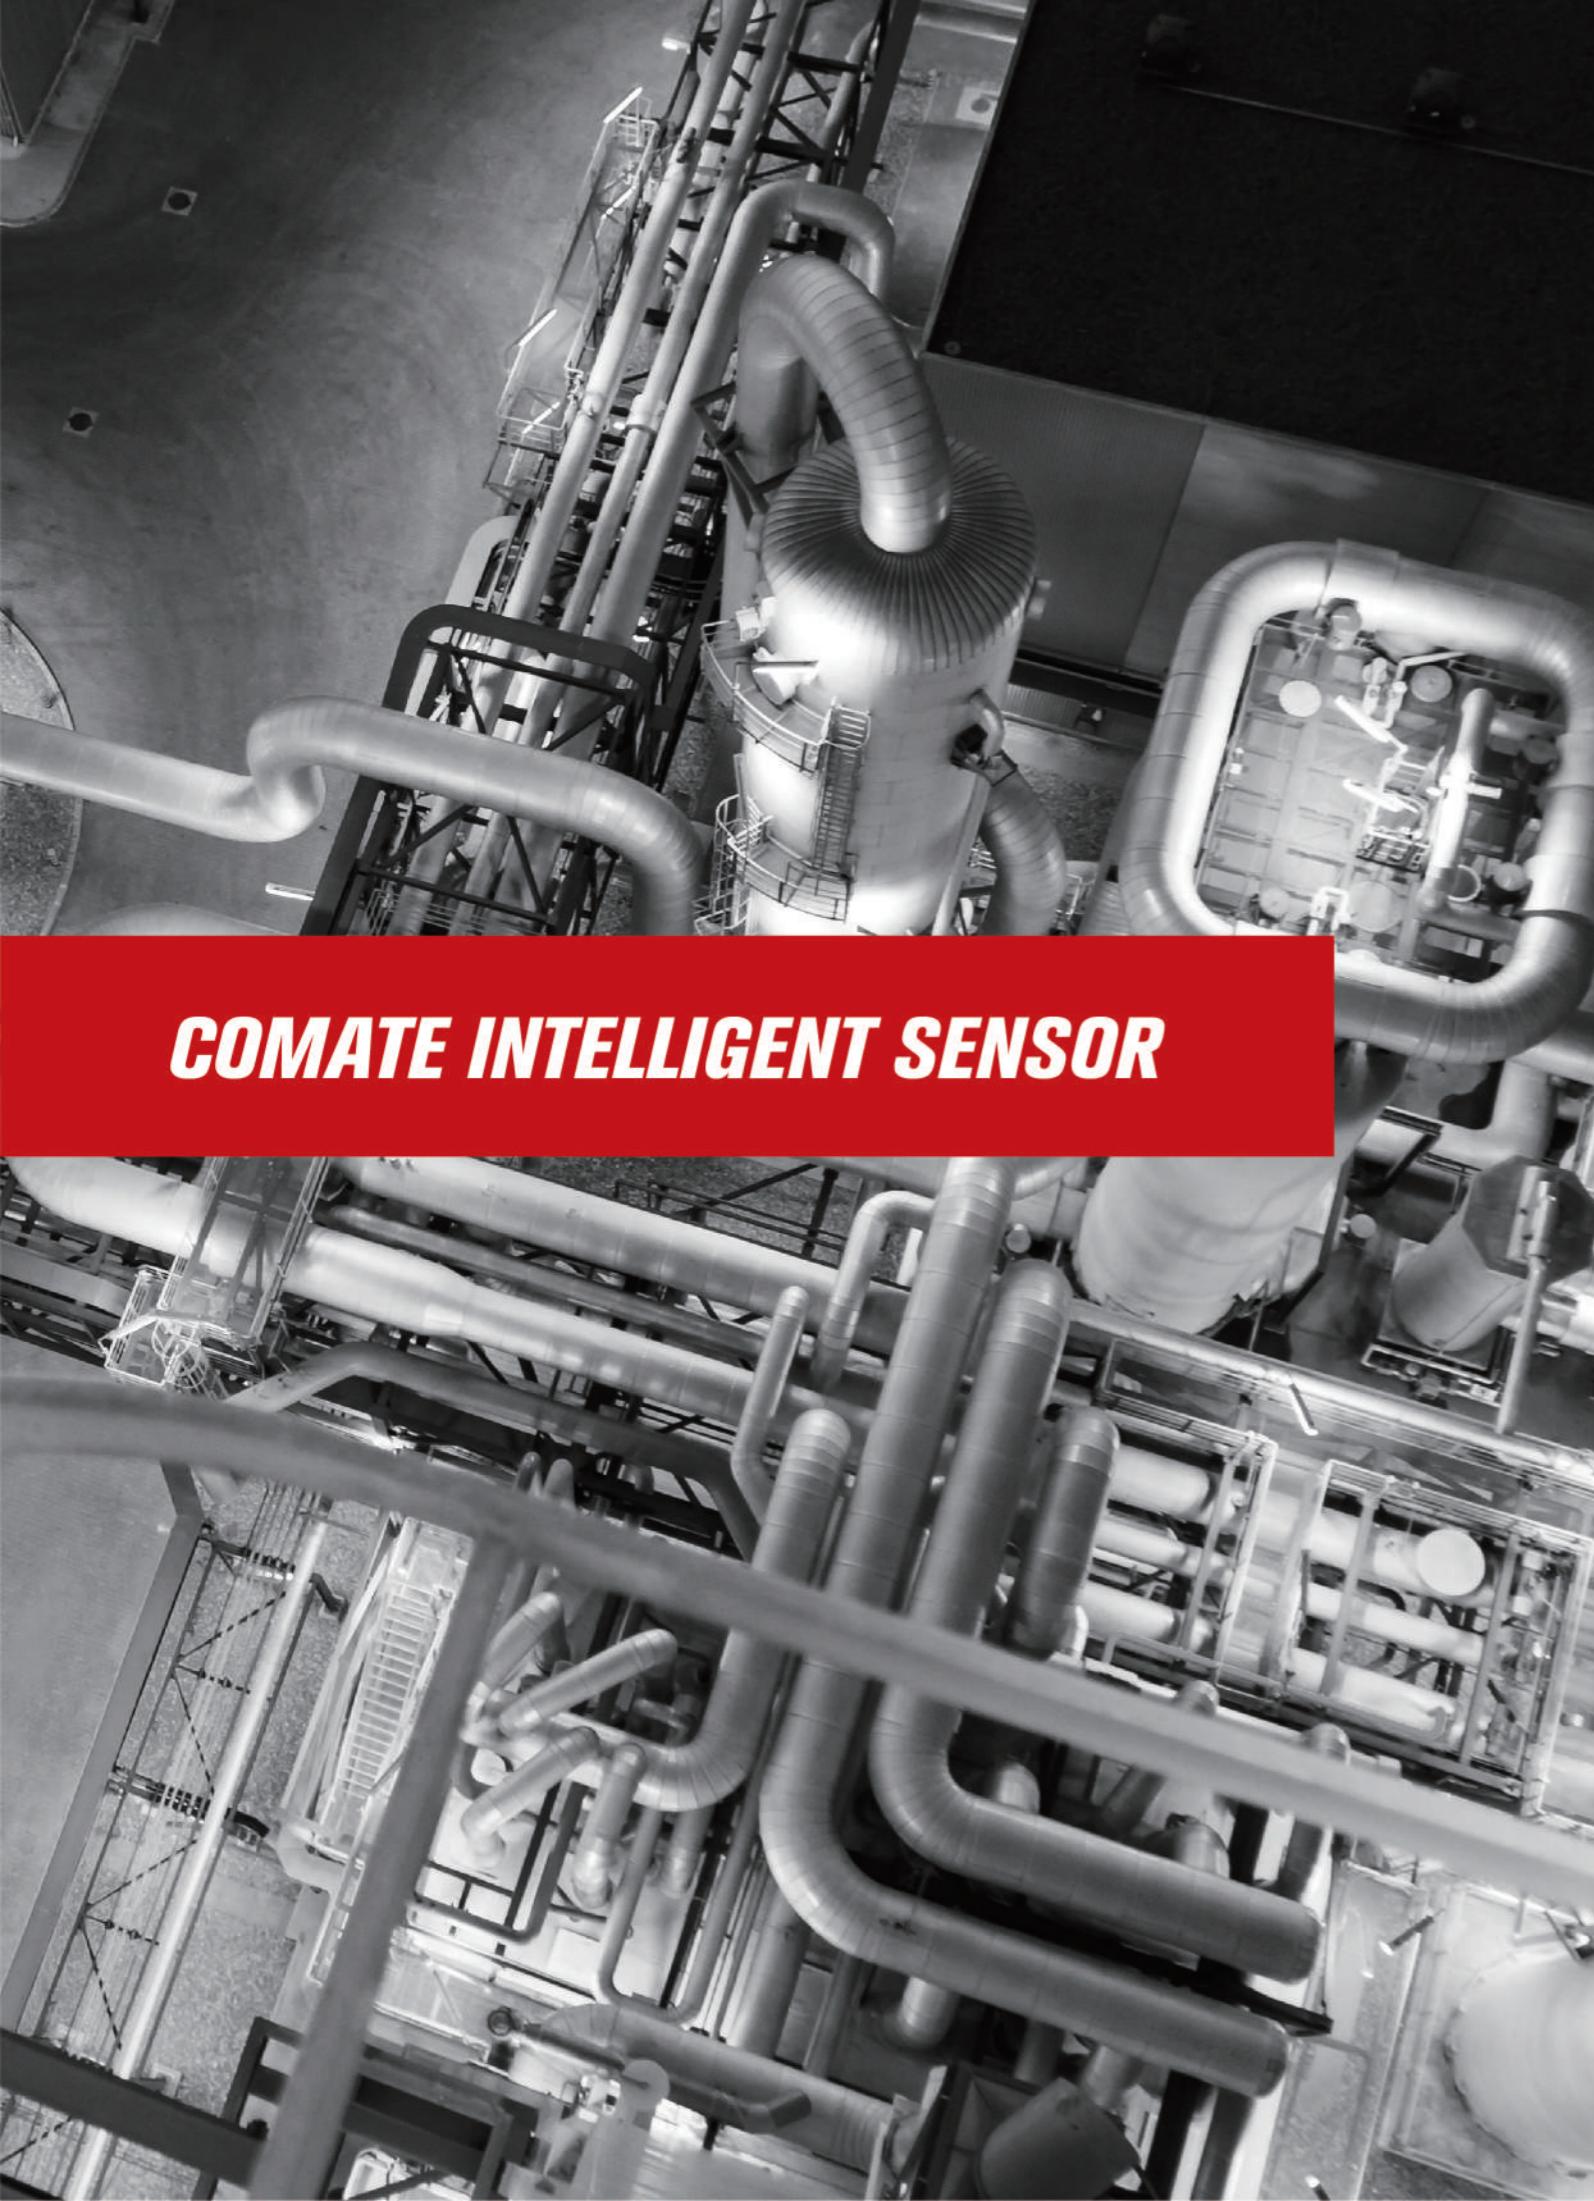

VFM80 VORTEX FLOW METER

Working principle

VFM80 is the best vortex flowmeter utilizing "Karman vortex" theory, Which can meet the requirement of measuring the flow rate of various fluids such as gas, steam and liquid.

Special features

- Patent dual-sensor design and optimized signal processing technology to ensure best anti-vibration
- Super low flow measurement down to 2m/s and 1:60 super wide turndown ratio
- Wider measuring range and higher accuracy
- Self-diagnose function plus remote diagnose function, ensure easier trouble-shooting.
- Built-in temperature and pressure compensation and direct mass flow measurement
- 3 channels of 4~20mA output temperature, pressure and flow
- Color LED display and optical touch button operation

Features

Process Fluids	Mostly for liquid, gas ,steam applications and widely used in mechanical manufacturing, electronics, food, metallurgy, pharmaceuticals, textiles
Line Sizes	The wafer and flanged type cover line sizes as below 0.5'',0.75'',1'',1.5'',2'',2.5'',3'',4'',5'',6'',8'',10'',12'' (DN15,DN20,DN25,DN40,DN50,DN65,DN80,DN100,DN125,DN150,DN200,DN250,DN300)
Process Connection	Wafer, Flange, ANSI, JIS, DIN standard flanges are optional for flanged connection
Displayer	2" TFT LCD (320*240) display and Optical touch key
Measurable Parameter	Mass flow rate, volume flow meter in standard condition, temperature, pressure, volume flow rate in pipe, velocity
Output Signal	4~20mA(HART@4~20mA) ModBus-RTU RS485
Pressure Allowance	7.1.6Mpa(232psiG)、2.5Mpa(362psiG)、4.0Mpa(580psiG)、6.3Mpa (913psiG) for option



Specification

Media compatibility	Gas/steam/liquid				
Pipe diameter	DN15~DN300(1/2~12inches)				
Flow velocity range	Gas/steam(standard)	DN15~DN20	6~70m/s		
		DN25~DN32	4~70m/s		
		DN40~DN300	2~70m/s		
Flow velocity range	Gas/steam(extension)	DN15~DN20	6~80m/s		
		DN25~DN32	4~120m/s		
		DN40~DN300	2~120m/s		
Accuracy	Liquid	0.3~7m/s			
	Volume flow	$\pm 1\%$ RD			
	Mass flow	$\pm 1.0\%$ RD			
	Pressure	$\pm 0.5\%$ FS			
Repeatability	Temperature	$\pm 1.0^\circ\text{C}$			
	$\pm 0.3\%$ RD				
Power supply	13.5~42V DC				
Output/comm	3x4~20mA/RS485 passive 1x4~20mA@RS485 passive 1x4~20mA@HART passive				
Medium temperature	-40°C~150°C (standard) -40°C~250°C (Middle) -40°C~350°C (High)				
Process Pressure	1.6Mpa/2.5Mpa/4.0Mpa/6.3Mpa				
Ambient temperature	-40~85°C				
Process connection	Wafer/flange				
Ingress protection grade	IP65/IP67				
Ex-proof	ATEX/IECEx				
Material	Wet part Transmitter Shell	304/316 304/316 Aluminium			

**Actual flow measuring range**

Pipe size	Steam/gas actual flow				Liquid actual flow			
	Min flow m³/hr	Max flow m³/hr	Min flow cu.ft/min	Max flow cu.ft/min	Min flow m³/hr	Max flow m³/hr	Min flow GPM	Max flow GPM
15mm 0.5 inch	3.8	44.5	2.2	26.2	0.2	4.4	0.8	19.6
20mm 0.75 inch	6.8	79.1	4	46.6	0.3	7.9	1.5	34.8
25mm 1 inch	7.1	123.6	4.2	72.7	0.5	12.4	2.3	54.4
32mm 1.25 inch	11.6	202.5	6.8	119.2	0.9	20.2	3.8	89.2
40mm 1.5 inch	9	316.4	5.3	186.2	1.4	31.6	6.0	139.3
50mm 2 inch	14.1	494.4	8.3	291	2.1	49.4	9.3	217.7
65mm 2.5 inch	23.9	835.5	14	491.7	3.6	83.5	15.8	367.8
80mm 3 inch	36.2	1265.5	21.3	744.9	5.4	126.6	23.9	557.2
100mm 4 inch	56.5	1977.4	33.3	1163.9	8.5	197.7	37.3	870.6
125mm 5 inch	88.3	3089.7	52	1818.5	13.2	309.0	58.3	1360.4
150mm 6 inch	127.1	4449.2	74.8	2618.7	19.1	444.9	84.0	1958.9
200mm 8 inch	226	7909.6	133	4655.4	33.9	791.0	149.3	3482.5
250mm 10 inch	353.1	12358.8	207.8	7274.1	53.0	1235.9	233.2	5441.4
300mm 12 inch	508.5	17796.6	299.3	10474.7	76.3	1779.7	335.8	7835.6

Saturated steam measuring range—Metric unit flow rate in kg/hr

Pipe size	T=112 dgrC P=0.5 barg D=0.8798 kg/m³		T=121 dgrC P=1 barG D=1.155 kg/m³		T=134 dgrC P=2 barg D=1.672 kg/m³		T=144 dgrC P=3 barg D=2.185 kg/m³		T=159 dgrC P=5 barg D=3.182 kg/m³	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
15mm 0.5 inch	3.4	39.1	4.4	51.4	6.4	74.4	8.3	97.2	12.1	141.6
20mm 0.75 inch	6.0	69.6	7.8	91.4	11.3	132.2	14.8	172.8	21.6	251.7
25mm 1 inch	6.2	108.7	8.2	142.7	11.8	206.6	15.4	270.0	22.5	393.3
32mm 1.25 inch	10.2	178.1	13.4	233.9	19.3	338.6	25.3	442.4	36.8	644.3
40mm 1.5 inch	8.0	278.4	10.4	365.4	15.1	529.0	19.8	691.3	28.8	1006.7
50mm 2 inch	12.4	434.9	16.3	571.0	23.6	826.6	30.9	1080.2	44.9	1573.0
65mm 2.5 inch	21.0	735.0	27.6	964.9	39.9	1396.9	52.2	1825.5	76.0	2658.4
80mm 3 inch	31.8	1113.4	41.8	1461.7	60.5	2116.0	79.0	2765.2	115.1	4026.9
100mm 4 inch	49.7	1739.7	65.3	2283.9	94.5	3306.2	123.4	4320.6	179.8	6292.1
125mm 5 inch	77.7	2718.3	102.0	3568.6	147.6	5166.0	192.9	6751.0	280.9	9831.4
150mm 6 inch	111.8	3914.4	146.8	5138.8	212.5	7439.0	277.8	9721.4	404.5	14157.2
200mm 8 inch	198.8	6958.9	261.0	9135.6	377.9	13224.9	493.8	17282.5	719.1	25168.4
250mm 10 inch	310.7	10873.2	407.8	14274.4	590.4	20663.8	771.5	27003.9	1123.6	39325.6
300mm 12 inch	447.4	15657.5	587.3	20555.1	850.2	29755.9	1111.0	38885.6	1618.0	56628.8

VFM80MV Multi-variable standard type support to 250°C/350°C

Pipe size		T=165 dgrC P=6 barG D=3.671 kg/m ³		T=171 dgrC P=7 barG D=4.218 kg/m ³		T=176 dgrC P=8 barG D=4.723 kg/m ³		T=185 dgrC P=10 barG D=5.752 kg/m ³	
		Min	Max	Min	Max	Min	Max	Min	Max
15mm	0.5 inch	14.0	163.3	16.1	187.7	18.0	210.1	21.9	255.9
20mm	0.75 inch	24.9	290.4	28.6	333.6	32.0	373.6	39.0	455.0
25mm	1 inch	25.9	453.7	29.8	521.3	33.4	583.7	40.6	710.9
32mm	1.25 inch	42.5	743.3	48.8	854.1	54.6	956.3	66.6	1164.7
40mm	1.5 inch	33.2	1161.4	38.1	1334.5	42.7	1494.3	52.0	1819.8
50mm	2 inch	51.9	1814.8	59.6	2085.2	66.7	2334.8	81.2	2843.5
65mm	2.5 inch	87.6	3066.9	100.7	3523.9	112.7	3945.8	137.3	4805.5
80mm	3 inch	132.7	4645.8	152.5	5338.0	170.8	5977.1	208.0	7279.4
100mm	4 inch	207.4	7259.0	238.3	8340.7	266.8	9339.3	325.0	11374.0
125mm	5 inch	324.1	11342.2	372.4	13032.3	416.9	14592.6	507.8	17771.9
150mm	6 inch	466.7	16332.8	536.2	18766.5	600.4	21013.3	731.2	25591.5
200mm	8 inch	829.6	29036.2	953.2	33362.7	1067.3	37357.1	1299.9	45496.0
250mm	10 inch	1296.3	45369.0	1489.4	52129.2	1667.7	58370.4	2031.1	71087.6
300mm	12 inch	1866.6	65331.4	2144.7	75066.1	2401.5	84053.4	2924.7	102366.1

Pipe size		T=192 dgrC P=12 barG D=6.671 kg/m ³		T=199 dgrC P=14 barG D=7.706 kg/m ³		T=210 dgrC P=18 barG D=9.593 kg/m ³		T=215 dgrC P=20 barG D=10.57 kg/m ³	
		Min	Max	Min	Max	Min	Max	Min	Max
15mm	0.5 inch	25.4	296.8	29.4	342.9	36.6	426.8	40.3	470.3
20mm	0.75 inch	45.2	527.6	52.2	609.5	65.0	758.8	71.7	836.0
25mm	1 inch	47.1	824.5	54.4	952.4	67.7	1185.6	74.6	1306.3
32mm	1.25 inch	77.2	1350.8	89.2	1560.4	111.0	1942.4	122.3	2140.3
40mm	1.5 inch	60.3	2110.6	69.7	2438.1	86.7	3035.1	95.5	3344.2
50mm	2 inch	94.2	3297.8	108.8	3809.5	135.5	4742.3	149.3	5225.3
65mm	2.5 inch	159.2	5573.3	183.9	6438.0	229.0	8014.5	252.3	8830.7
80mm	3 inch	241.2	8442.4	278.6	9752.2	346.9	12140.3	382.2	13376.7
100mm	4 inch	376.9	13191.2	435.4	15237.9	542.0	18969.2	597.2	20901.1
125mm	5 inch	588.9	20611.3	680.3	23809.1	846.8	29639.4	933.1	32658.0
150mm	6 inch	848.0	29680.3	979.6	34285.2	1219.4	42680.7	1343.6	47027.5
200mm	8 inch	1507.6	52765.0	1741.5	60951.4	2167.9	75876.8	2388.7	83604.5
250mm	10 inch	2355.6	82445.3	2721.0	95236.6	3387.4	118557.6	3732.3	130632.1
300mm	12 inch	3392.0	118721.2	3918.3	137140.7	4877.8	170722.9	5374.6	188110.2

Saturated steam measuring range—Imperial unit flow rate in lb/hr

Pipe size		T=233.6 dgrF P=7.3 pisG D=0.0034 lb/ft ³		T=249.8 dgrF P=14.5 pisG D=0.0721 lb/ft ³		T=273.2 dgrF P=29 pisG D=0.1044 lb/ft ³		T=291.2 dgrF P=43.5 pisG D=0.1346 lb/ft ³		T=318.2 dgrF P=72.5 pisG D=0.1986 lb/ft ³	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
15mm	0.5 inch	7.4	86.3	9.7	113.3	14.1	164.0	18.4	214.3	26.8	312.1
20mm	0.75 inch	13.2	153.4	17.3	201.4	25.0	291.6	32.7	381.0	47.6	554.9
25mm	1 inch	13.7	239.7	18.0	314.7	26.0	455.6	34.0	595.3	49.5	867.0
32mm	1.25 inch	22.4	392.7	29.5	515.6	42.7	746.4	55.7	975.4	81.2	1420.5
40mm	1.5 inch	17.5	613.7	23.0	805.6	33.3	1166.2	43.5	1524.1	63.4	2219.5
50mm	2 inch	27.4	958.9	36.0	1258.8	52.1	1822.2	68.0	2381.3	99.1	3467.9
65mm	2.5 inch	46.3	1620.5	60.8	2127.3	88.0	3079.6	115.0	4024.5	167.5	5860.8
80mm	3 inch	70.1	2454.7	92.1	3222.5	133.3	4664.9	174.2	6096.2	253.7	8877.9
100mm	4 inch	109.6	3835.4	143.9	5035.1	208.3	7289.0	272.2	9525.3	396.3	13871.7
125mm	5 inch	171.2	5992.8	224.8	7867.4	325.4	11389.0	425.2	14883.3	619.3	21674.5
150mm	6 inch	246.6	8629.7	323.7	11329.1	468.6	16400.2	612.3	21432.0	891.8	31211.3
200mm	8 inch	438.3	15341.7	575.4	20140.5	833.0	29155.8	1088.6	38101.4	1585.3	55486.7
250mm	10 inch	684.9	23971.4	899.1	31469.6	1301.6	45556.0	1701.0	59533.4	2477.1	86698.0
300mm	12 inch	986.3	34518.8	1294.7	45316.2	1874.3	65600.6	2449.4	85728.1	3567.0	124845.2

Pipe size		T=329 dgrF P=87 pisG D=0.2292 lb/ft³		T=339.8 dgrF P=101.5 pisG D=0.2633 lb/ft³		T=348.8 dgrF P=116 pisG D=0.2948 lb/ft³		T=365 dgrF P=145 pisG D=0.3591 lb/ft³	
Min	Max	Min	Max	Min	Max	Min	Max		

<tbl_r

Saturated steam measuring range—Imperial unit flow rate in lb/hr

The standard model number is usually VFM80MV-2-WC-1-N-N-ML1-M-N-xxx

Mode codes

1 General model	VFM80-MV	Vortex mass flowmeter with integral RTD and pressure sensor	Standard
	VFM80-N	Vortex flowmeter without integral RTD and pressure sensor	Option
2 Fluid type	1	Liquid	Option
	2	Gas	Standard
	3	Steam	Option
3 Process connection	IN	Insertion (only for DN300 ~ DN1000 or 12 inch ~ 40 inch)	Option
	WC	Wafer with carbon steel flanges up to 16 barG (232 psiG) (DN15 ~ DN300)	Standard
	WF	Wafer with stainless steel flanges up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
	D1	Flanged DIN PN16 up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
	D2	Flanged DIN PN25 up to 25 barG (362 psiG) (DN15 ~ DN300)	Option
	D3	Flanged DIN PN40 up to 40 barG (580 psiG) (DN15 ~ DN300)	Option
	D4	Flanged DIN PN63 up to 63 barG (913 psiG) (DN15 ~ DN300)	Option
	C1	Flanged ANSI CL150 up to 16 barG (232 psiG) (0.5 inch ~ 12 inch)	Option
	C2	Flanged ANSI CL300 up to 40 barG (580 psiG) (0.5 inch ~ 12 inch)	Option
	C3	Flanged ANSI CL400 up to 63 barG (913 psiG) (0.5 inch ~ 12 inch)	Option
	J1	JIS 10K up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
	J2	JIS 20K up to 40 barG (580 psiG) (DN15 ~ DN300)	Option
4 Wetted part material	J3	JIS 30K up to 63 barG (913 psiG) (DN15 ~ DN300)	Option
	1	OCr18Ni9 (304)	Standard
	2	316	Option
5 Degreased	Q	Other	Option
	N	Wet part not degreased	Standard
6 Medium Temperature	D	Wet part degreased for Oxygen measurement	Option
	N	T≤150°C	Standard
	S	T≤250°C (wafer or flanged)	Option
7 Transmitter	H	T≤350°C (wafer or flanged)	Option
	ML1	Integral transmitter,multi-variable,Bluetooth,RS485,pulse	Standard
	ML2	Integral transmitter,multi-variable,Bluetooth,3x4...20mA,RS485,pulse	Option
	ML3	Integral transmitter,multi-variable,Bluetooth,1x4...20mA@HART,2x4...20mA,pulse	Option
	MR1	Remote transmitter(dual display),multi-variable,Bluetooth,RS485,pulse	Option
	MR2	Remote transmitter(dual display),multi-variable,Bluetooth, 3x4...20mA,RS485,pulse	Option
	MR3	Remote transmitter(dual display),multi-variable,Bluetooth, 3x4...20mA,RS485,pulse	Option

7 Transmitter	NL1	Integral transmitter, Bluetooth,RS485,pulse	Option
	NL2	Integral transmitter ,Bluetooth,1x4...20mA,RS485,pulse	Option
	NL3	Integral transmitter ,Bluetooth,3x4...20mA,RS485,pulse	Option
	NL4	Integral transmitter ,Bluetooth,1x4...20mA,HART ,pulse	Option
8 Cable grinder	NR1	Remote transmitter(dual display), Bluetooth,RS485,pulse	Option
	NR2	Remote transmitter(dual display), Bluetooth, 1x4...20mA ,RS485,pulse	Option
	NR3	Remote transmitter(dual display), Bluetooth, 3x4...20mA ,RS485,pulse	Option
	NR4	Remote transmitter(dual display), Bluetooth, 1x4...20mA,HART,pulse	Option
9 Ex-proof	M	M20x1.5	Standard
	N	NPT 1/2	Option
10 Pipe size	N	No Ex-proof	Option
	1	ATEX/IECEx	Option
10 Pipe size	015	DN15 or 0.5 inch	
	020	DN20 or 0.75 inch	
	025	DN25 or 1 inch	
	032	DN32 or 1.25 inch	
	040	DN40 or 15 inch	
	050	DN50 or 2 inch	
	065	DN65 or 2.5 inch	
	080	DN80 or 3 inch	
	100	DN100 or 4 inch	
	125	DN125 or 5 inch	
	150	DN150 or 6 inch	
	200	DN200 or 8 inch	
	250	DN250 or 10 inch	
	300	DN300 or 12 inch	

VFM60 VORTEX FLOW METER

Working principle

VFM60 is a powerful flow meter utilizing "Karman vortex" theory, which can meet the requirement of measuring the flow rate of various fluids such as gas, steam and liquid.

Special features

- Super low flow measurement down to 2m/s
- Unique dual sensor technology excellent in anti-vibration
- Multi-variable flow meter, measures flow rate, temperature, pressure, FAD measurement available
- Blue tooth function optional, can read and set on COMATE APP with smart phone or pad
- Self-diagnose function plus remote diagnose function, ensure easier trouble-shooting.
- No mechanical wear part

Features

Process Fluids	Used in liquid, gas, and steam applications. Fluids must be homogeneous and single-phase.
Line Sizes	The wafer and flanged type cover line sizes as below. 0.5", 0.75", 1", 1.5", 2", 2.5", 3", 4", 5", 6", 8", 10", 12", (DN15, DN20, DN25, DN40, DN50, DN65, DN80, DN100, DN125, DN150, DN200, DN250, DN300) The insertion type covers DN300~1000.
Process Connection	Flange, wafer, insertion, ANSI, JIS, DIN Standard flanges are optional for flanged connection
Displayer	Integral or remote. 3 buttons control. 2 lines LCD display. 1st line has 5 digits to display mass flow or volume flow or frequency or temperature or pressure 2nd line has 8 digits to display total flow A small extra line above 1st line will indicate what parameter being displayed in 1st line.
Measurable Parameter	Standard version: Volume flow rate in pipe (Can measure mass flow rate, temperature and pressure if wired to separate RTD and pressure transmitter.) Multi-variable version: Mass flow rate, volume flow rate in standard condition, temperature, pressure, volume flow rate in pipe, velocity.
Output Signal	Pulse, high level $\geq 5V$, low level $< 1V$, 50% duty ratio 4~20mA (HART@4~20mA) ModBus-RTU RS485
Pressure Allowance	1.6MPa (232 psiG)、2.5MPa (362 psiG)、4.0MPa (580 psiG)、6.3Mpa (913 psiG) for option



Measurement range

Medium	Min Velocity	Max Velocity
Gas	6m/s for DN15、DN20 (19.7 ft/s) for 0.5" and 0.75" 4m/s, DN25, DN32 (13.1 ft/s) for 1" and 1.25" 2m/s, DN40 ~ DN300 (6.7 ft/s) for 1.5" ~ 12"	60m/s (196.9 ft/s)
Steam	6m/s for DN15、DN20 (19.7 ft/s) for 0.5" and 0.75" 4m/s, DN25, DN32 (13.1 ft/s) for 1" and 1.25" 2m/s, DN40 ~ DN300 (6.7 ft/s) for 1.5" ~ 12"	70m/s (229.7 ft/s)
Liquid	0.3m/s (1 ft/s)	7m/s (23 ft/s)



VFM60N Standard type vortex meter without temperature & pressure compensation

Specification

Process connection	Flange Wafer	DN15~DN300 or 0.5 inch to 12 inch DN15~DN300 or 0.5 inch to 12 inch
Medium temperature	Standard Medium High	-40 ~ 150 °C or -40 ~ 302 °F -40 ~ 250 °C or -40 ~ 482 °F -40 ~ 350 °C or -40 ~ 662 °F
Power supply	4~20mA 2 wire system VFM60MV with 4~20mA(2 wire) Modbus RTU	13.5 ~ 42V 15.5 ~ 42V Current Iq < 9mA 13.4 ~ 42V
Reynolds and accuracy	Actual flow Mass flow/ Standard flow	±1.0% RD(10000< Re< 20000) +1.0% RD (10000< Re< 20000)
Pressure	+0.5%FS	
Temperature	+1.0°C	
Turndown ratio	Gas Steam Liquid	1:30 1:35 1:22
Repeatability	Volume flow Mass flow Temperature Pressure	±0.3% ±0.3% ±0.05 °C ±0.05%FS

Upstream/Downstream requires	15 x D / 5 x D Details please check in manual
Viscosity allowance	DN15 or 0.5 inch ≤ 4 mPas DN25 or 1 inch ≤ 5 mPas DN40~DN300 or 1.5~12 inch ≤ 7 mPas
Anti-vibration (both punch and fixed freq)	0.5g
Display	LCD display
Saturated /superheated steam measurement	Support
Natural gas/Biogas, ect	Support
Communication	HART(V5、V7)/ Modbus-RTU/ Pulse
Explosive proof	Ex db IIC T1...T6 Gb



VFM60MV Multi-variable Vortex Meter standard type support up to 150 °C



VFM60MV Multi-variable Vortex Meter high temperature support up to 250°C

Actual flow measuring range

Pipe size	Steam/gas actual flow				Liquid actual flow			
	Min flow m³/hr	Max flow m³/hr	Min flow cu.ft/min	Max flow cu.ft/min	Min flow m³/hr	Max flow m³/hr	Min flow GPM	Max flow GPM
15mm 0.5 inch	3.8	44.5	2.2	26.2	0.2	4.4	0.8	19.6
20mm 0.75 inch	6.8	79.1	4	46.6	0.3	7.9	1.5	34.8
25mm 1 inch	7.1	123.6	4.2	72.7	0.5	12.4	2.3	54.4
32mm 1.25 inch	11.6	202.5	6.8	119.2	0.9	20.2	3.8	89.2
40mm 1.5 inch	9	316.4	5.3	186.2	1.4	31.6	6.0	139.3
50mm 2 inch	14.1	494.4	8.3	291	2.1	49.4	9.3	217.7
65mm 2.5 inch	23.9	835.5	14	491.7	3.6	83.5	15.8	367.8
80mm 3 inch	36.2	1265.5	21.3	744.9	5.4	126.6	23.9	557.2
100mm 4 inch	56.5	1977.4	33.3	1163.9	8.5	197.7	37.3	870.6
125mm 5 inch	88.3	3089.7	52	1818.5	13.2	309.0	58.3	1360.4
150mm 6 inch	127.1	4449.2	74.8	2618.7	19.1	444.9	84.0	1958.9
200mm 8 inch	226	7909.6	133	4655.4	33.9	791.0	149.3	3482.5
250mm 10 inch	353.1	12358.8	207.8	7274.1	53.0	1235.9	233.2	5441.4
300mm 12 inch	508.5	17796.6	299.3	10474.7	76.3	1779.7	335.8	7835.6

Saturated steam measuring range—Metric unit flow rate in kg/hr

Pipe size	T=121 dgrC P=1 barG D=1.155 kg/m³		T=144 dgrC P=3 barG D=2.185 kg/m³		T=159 dgrC P=5 barG D=3.182 kg/m³		T=165 dgrC P=6 barG D=3.671 kg/m³		T=171 dgrC P=7 barG D=4.218 kg/m³	
	Min	Max								
15mm 0.5 inch	4.4	51.4	8.3	97.2	12.1	141.6	14	163.3	16.1	187.7
20mm 0.75 inch	7.8	91.4	14.8	172.8	21.6	251.7	24.9	290.4	28.6	333.6
25mm 1 inch	8.2	142.7	15.4	270	22.5	393.3	25.9	453.7	29.8	521.3
32mm 1.25 inch	13.4	233.9	25.3	442.4	36.8	644.3	42.5	743.3	48.8	854.1
40mm 1.5 inch	10.4	365.4	19.8	691.3	28.8	1006.7	33.2	1161.4	38.1	1334.5
50mm 2 inch	16.3	571	30.9	1080.2	44.9	1573	51.9	1814.8	59.6	2085.2
65mm 2.5 inch	27.6	964.9	52.2	1825.5	76	2658.4	87.6	3066.9	100.7	3523.9
80mm 3 inch	41.8	1461.7	79	2765.2	115.1	4026.9	132.7	4645.8	152.5	5338
100mm 4 inch	65.3	2283.9	123.4	4320.6	179.8	6292.1	207.4	7259	238.3	8340.7
125mm 5 inch	102	3568.6	192.9	6751	280.9	9831.4	324.1	11342.2	372.4	13032.3
150mm 6 inch	146.8	5138.8	277.8	9721.4	404.5	14157.2	466.7	16332.8	536.2	18766.5
200mm 8 inch	261	9135.6	493.8	17282.5	719.1	25168.4	829.6	29036.2	953.2	33362.7
250mm 10 inch	407.8	14274.4	771.5	27003.9	1123.6	39325.6	1296.3	45369	1489.4	52129.2
300mm 12 inch	587.3	20555.1	1111	38885.6	1618	56628.8	1866.6	65331.4	2144.7	75066.1

Pipe size	T=176 dgrC P=8 barG D=4.723 kg/m³		T=185 dgrC P=10 barG D=5.752 kg/m³		T=192 dgrC P=12 barG D=6.671 kg/m³		T=199 dgrC P=14 barG D=7.706 kg/m³		T=215 dgrC P=20 barG D=10.57 kg/m³	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
15mm 0.5 inch	18	210.1	21.9	255.9	25.4	296.8	29.4	342.9	40.3	470.3
20mm 0.75 inch	32	373.6	39	455	45.2	527.6	52.2	609.5	71.7	836
25mm 1 inch	33.4	583.7	40.6	710.9	47.1	824.5	54.4	952.4	74.6	1306.3
32mm 1.25 inch	54.6	956.3	66.6	1164.7	77.2	1350.8	89.2	1560.4	122.3	2140.3
40mm 1.5 inch	42.7	1494.3	52	1819.8	60.3	2110.6	69.7	2438.1	95.5	3344.2
50mm 2 inch	66.7	2334.8	81.2	2843.5	94.2	3297.8	108.8	3809.5	149.3	5225.3
65mm 2.5 inch	112.7	3945.8	137.3	4805.5	159.2	5573.3	183.9	6438	252.3	8830.7
80mm 3 inch	170.8	5977.1	208	7279.4	241.2	8442.4	278.6	9752.2	382.2	13376.7
100mm 4 inch	266.8	9339.3	325	11374	376.9	13191.2	435.4	15237.9	597.2	20901.1
125mm 5 inch	416.9	14592.6	507.8	17771.9	588.9	20611.3	680.3	23809.1	933.1	32658
150mm 6 inch	600.4	21013.3	731.2	25591.5	848	29680.3	979.6	34285.2	1343.6	47027.5
200mm 8 inch	1067.3	37357.1	1299.9	45496	1507.6	52765	1741.5	60951.4	2388.7	83604.5
250mm 10 inch	1667.7	58370.4	2031.1	71087.6	2355.6	82445.3	2721	95236.6	3732.3	130632.1
300mm 12 inch	2401.5	84053.4	2924.7	102366.1	3392	118721.2	3918.3	137140.7	5374.6	188110.2

saturated steam measuring range—Imperial unit flow rate in lb/hr

Pipe size	T=249.8 dgrF P=14.5 pisG D=0.0721 lb/ft³		T=291.2 dgrF P=43.5 pisG D=0.1364 lb/ft³		T=318.2 dgrF P=72.5 pisG D=0.1986 lb/ft³	
-----------	------------------------------------------------	--	------------------------------------------------	--	------------------------------------------------	--

saturated steam measuring range—Imperial unit flow rate in lb/hr

The standard model number is usually VFM60MV-2-WC-1-N-N-ML1-M-N-XXX,
Please reference to the table below for what the model codes stand for.

Mode codes

1 General model	VFM60-MV	Vortex mass flowmeter with integral RTD and pressure sensor	Standard
	VFM60-N	Vortex flowmeter without integral RTD and pressure sensor	Option
2 Fluid type	1	Liquid	Option
	2	Gas	Standard
	3	Steam	Option
3 Process connection	IN	Insertion (only for DN300 ~ DN1000 or 12 inch ~ 40 inch)	Option
	WC	Wafer with carbon steel flanges up to 16 barG (232 psiG) (DN15 ~ DN300)	Standard
	WF	Wafer with stainless steel flanges up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
	D1	Flanged DIN PN16 up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
	D2	Flanged DIN PN25 up to 25 barG (362 psiG) (DN15 ~ DN300)	Option
	D3	Flanged DIN PN40 up to 40 barG (580 psiG) (DN15 ~ DN300)	Option
	D4	Flanged DIN PN63 up to 63 barG (913 psiG) (DN15 ~ DN300)	Option
	C1	Flanged ANSI CL150 up to 16 barG (232 psiG) (0.5 inch ~ 12 inch)	Option
	C2	Flanged ANSI CL300 up to 40 barG (580 psiG) (0.5 inch ~ 12 inch)	Option
	C3	Flanged ANSI CL400 up to 63 barG (913 psiG) (0.5 inch ~ 12 inch)	Option
	J1	JIS 10K up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
	J2	JIS 20K up to 40 barG (580 psiG) (DN15 ~ DN300)	Option
	J3	JIS 30K up to 63 barG (913 psiG) (DN15 ~ DN300)	Option
	1	OCr18Ni9 (304)	Standard
4 Wetted part material	2	316	Option
	Q	Other	Option
5 Degreased	N	Wet part not degreased	Standard
	D	Wet part degreased for Oxygen measurement	Option
6 Medium Temperature	N	T≤150°C	Standard
	S	T≤250°C (wafer or flanged)	Option
	H	T≤350°C (wafer or flanged)	Option
7 Transmitter	ML1	Integral transmitter, multi-variable, bluetooth, RS485, pulse,	Standard
	ML3	Integral transmitter, multi-variable, bluetooth, RS485, pulse, 4 wire 4~20mA	Option
	ML4	Integral transmitter, multi-variable, bluetooth, pulse, 4 wire HART@4~20mA	Option

7 Transmitter	ML5	Integral transmitter, multi-variable, pulse, 2 wire 4~20mA	Option
	ML6	Integral transmitter, multi-variable, pulse, 2 wire HART@4~20mA	Option
	MR1	Remote transmitter (dual display), multi-variable, bluetooth, RS485, pulse	Option
	MR2	Remote transmitter (dual display), multi-variable, bluetooth, RS485, pulse, 4 wire 4~20mA	Option
	NL1	Integral transmitter, bluetooth, RS485, pulse,	Option
	NL3	Integral transmitter, bluetooth, RS485, pulse, 4 wire 4~20mA	Option
	NL4	Integral transmitter, bluetooth, pulse, 4 wire HART@4~20mA	Option
	NL6	Integral transmitter, pulse, 2 wire HART@4~20mA	Option
	NR1	Remote transmitter (dual display), bluetooth, RS485, pulse,	Option
	NR3	Remote transmitter (dual display), bluetooth, RS485, pulse, 4 wire 4~20mA	Option
	NR4	Remote transmitter (single display), bluetooth, pulse, 4 wire HART@4~20mA	Option
	NR6	Remote transmitter (single display), pulse, 2 wire HART@4~20mA	Option
8 Cable grinder	M	M20x1.5	Standard
	N	NPT 1/2	Option
9 Ex-proof	N	No Ex-proof	Standard
	1	Ex db IIC T1...T6 Gb	Option
	015	DN15 or 0.5 inch	
	020	DN20 or 0.75 inch	
	025	DN25 or 1 inch	
	032	DN32 or 1.25 inch	
	040	DN40 or 1.5 inch	
	050	DN50 or 2 inch	
	065	DN65 or 2.5 inch	
	080	DN80 or 3 inch	
	100	DN100 or 4 inch	
	125	DN125 or 5 inch	
	150	DN150 or 6 inch	
	200	DN200 or 8 inch	
	250	DN250 or 10 inch	
	300	DN300 or 12 inch	
10 Pipe size			

VFM55 VORTEX FLOW SENSOR

Working principle

VFM55 Vortex flow sensor based on "Karman vortex" theory, and designed for air, gas and liquid in small pipeline measurement.

Special features

- Wet/dry air measurement
- DN8~DN25(1/4"~1") small pipe line measurement
- Combines temperature, pressure, flow and standard flow measurement
- Blue tooth function optional, can read and set on COMATE APP with smart phone or pad
- Battery power supply and also have 24VDC
- User-friendly operating interface



Specification

Fluid Compatibility	air, non-corrosive gas, liquid	Power supply	battery or 24 VDC						
Pipe Diamter	8mm ~ 25mm(1/4" ~ 1")	Communication	pulse, RS485, Bluetooth						
Measure Range	16~300L/min(volume flow)	Data Display	temperature, pressure, standard flow						
Accuracy	1.0% of reading or 3.0% of reading	Housing	PPS						
Fluid Temperature	-40~+80°C	Wetted Parts Material	Aluminium-alloy						
Pressure Rating	1.0Mpa								
		4barG	5barG						
Pipe size (mm)	Pipe size (inch)	Min NL/min	Max NL/min	Min NL/min	Max NL/min	Min NL/min	Max NL/min		
8mm~25mm	1/4"~1"	80	1500	96	1800	112	2100	128	2400

Mode number

The Standard model number is usually VFM55-A-G-1-1-XXX
Pls reference to the table below for what the model codes stands for

Mode codes

1	Mode	VFM55	Basic mode	Standard
2	Output	A	Pulse,RS485,Bluetooth	Standard
3	Connection	G	G thread male	Standard
4	Accuracy	1	1.0%RD	Standard
		2	3.0%RD	Optional
5	Power Supply	1	Battery	Standard
		N	24VDC	Optional
		8	DN8(1/4")	Optional
6	Pipe size	10	DN10(3/8")	Optional
		15	DN15(1/2")	Standard
		20	DN20(3/4")	Optional
		25	DN25(1")	Optional



VFM52 VORTEX FLOW SENSOR

Working principle

VFM52 Vortex flow sensor is designed based on "Karman Vortex street" principle, it is a compact, economical model product.

Special features

- Can handle vibration interference base on its dual-sensor design
- 1:30 super wide turn down, measurement range down to 10L/min
- 1%RD accuracy even at minus pressure
- Use special anti-corrosive material for corrosive fluid measurement
- No moving part, Bluetooth remote diagnosis available
- For gas and low viscosity liquid flow measurement. Economical solution for massive installation



Specification


Pipe Size	DN15(DN8-DN25 available connector)	Process connection	G1/2 thread
Measurement range	For water: 1~20L/min For gas/air: 10~300L/min (actual flow)	Environment temperature	-20°C~60°C
Accuracy	Standard: 3%RD High accuracy model: 1%RD	Environment humidity	5%~99%
Repeatability	0.3%	Protection	IP67
Power supply	5V DC	Ex-proof	Ex ia II B T4 Ga
Output/Comm	Pulse(Default is 2.5L/pulse ,can set through BT)	Ex cert No.	CNEx22.1867
Medium temperature	-40°C~85°C	Material	Shedder bar:PPS Shell:PPS
Pressure rating	1.0Mpa		

Safety Barrier Specification

Ex-proof	[Ex ia Ga] II B Um:230V, Uo:5.88V, Po:0.27W, Io:180mA
Voltage	12~32VDC
Working temperature	-20°C~60°C



Typical application

- Hot Water
- Compressed air consumption
- Gasoline recovery
- Other non-corrosive gas in small pipe such as CO₂, Argon


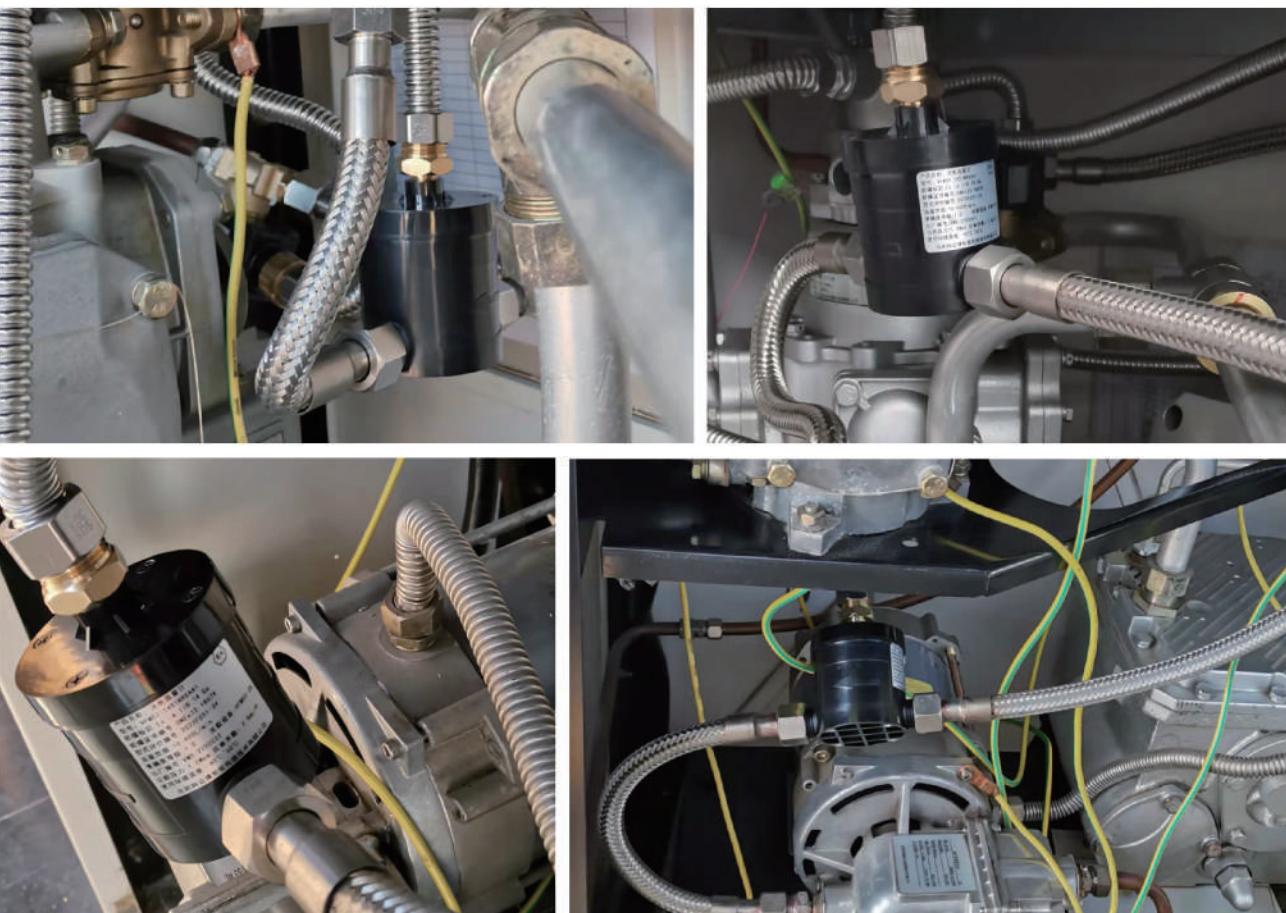


Dimension

Dimension of flow meter

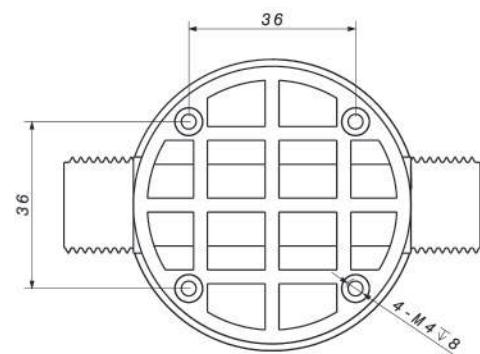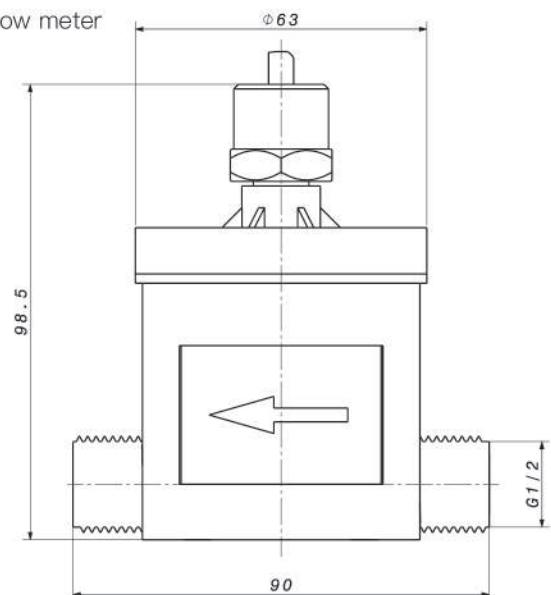

Dimension of safety barrier

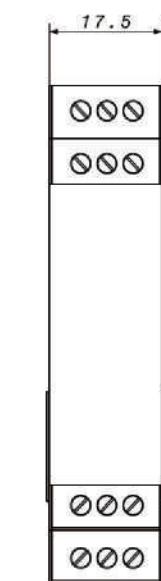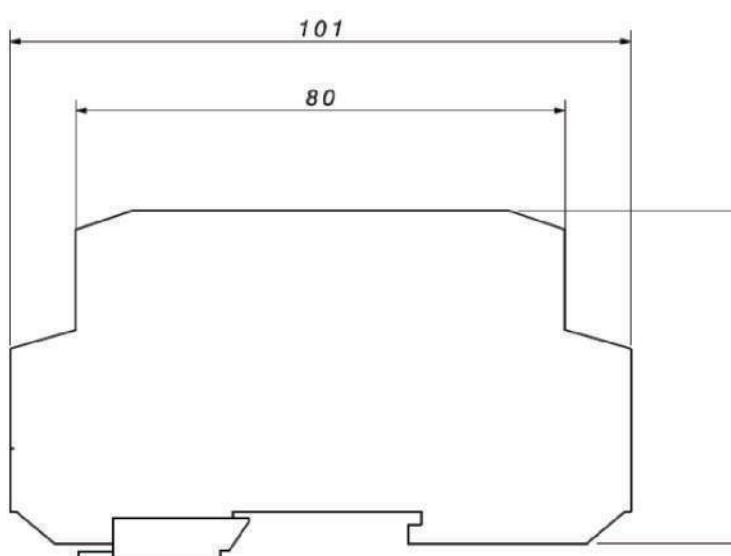

Model Number

The Standard model number is usually VFM52-2-A-G-1-1-XXX

Pls reference to the table below for what the model codes stands for

Mode codes

1	Mode	VFM52MV	Vortex flow sensor with integral RTD and pressure sensor	Optional
		VFM52	Vortex flow sensor without integral RTD and pressure sensor	Standard
2	Fluid type	1	Fluid	Optional
		2	gas	Standard
	A	Frequency,RS485,bluetooth		Standard
	B	Frequency,4~20mA,RS485,bluetooth		Optional
3	Output	C	Direct 5VDC power;3V pulse output	Optional
		D	24V Power with barrier;Pulse output	Optional
4	Connection	G	G thread male	Standard
5	Accuracy	1	1.0%RD	Standard
		2	3.0%RD	Optional
6	Power supply	1	24VDC	Standard
		8	DN8(1/4")	Optional
		10	DN10(3/8")	Optional
7	Pipe Size	15	DN15(1/2")	Standard
		20	DN20(3/4")	Optional
		25	DN25(1")	Optional



TGF600 THERMAL MASS FLOW METER

Working principle

TGF600 Series Thermal Mass Flowmeter measures the gas mass flow base on thermal diffusion theory. It has two filmed RTDs as its sensors, one of which sense the velocity of the gas flow (RH) and the other one will detect the temperature shift of the gas flow (RMG). When the two RTD are in the gas flow ,the RH will be heated while the RMG will sense the temperature changing of the gas flow. More heat will be taken away as the velocity of the gas flow increasing, so the temperature on RH will decline.

Special features


- Direct mass flow or normal flow measurement
- 100:1 turn down ratio in 5 ranges: 0.3~30Nm/s, 0.6Nm/s~60 Nm/s, 0.9~90Nm/s, 1.2~120Nm/s, or 1.5~150Nm/s
- No pressure loss, suitable for pipe in any shape with known sectional area
- For the insertion type, installation and maintenance can be finished on line
- High accuracy data acquisition circuit to ensure outstanding repeatability and accuracy
- High efficiency design of power supply, the total power consumption is only 60mA@24VDC
- 16V~32V wide voltage range input to fit in all electricity environment
- Self-diagnose function plus remote diagnose function, ensure easier trouble-shooting
- Ex-proof version optional
- Bluetooth communication for reading, setting and diagnosis and COMMATE APP
- No mechanical wear part



Specification

Media Compatibility	Air, Nitrogen, O ₂ , CO ₂ , Argon, CH ₄ , Natural gas, biogas, and almost all dry and clean air	
Pipe Diameter	Insertion: DN25 ~ 2500mm Inline: DN25 ~ 300mm	
Flow Velocity Range	0.3~30Nm/s 0.6~60Nm/s 0.9~90Nm/s 1.2~120Nm/s 1.5~150Nm/s	
Accuracy	1.5% Reading	± 0.5% Full Scale
Temperature of Medium	Standard: -40 ~ +150°C Middle: -40 ~ +250°C High: -40 ~ +450°C	
Pressure of Medium	Insertion: 1.6 MPa Flanged insertion: 6.3 MPa Flanged in-line: 6.3 MPa	
Process Connection	NPT 1" insertion with ball valve	
Power Supply	AC85~264V or DC16~32V	
Response Time	1 second	
Output	Frequency and 4~20mA as standard	
Communication	RS~485 + Bluetooth as standard , 4~20mA@HART as optional	
Date Displayed	Mass flow, Total flow Volume flow in normal condition	
Ingress Protection Grade	IP65 (GB China)	
Ex-proof	Ex db IIC T1...T6 Gb	

Insertion type with ball valve
Install/remove the meter without stopping the flow

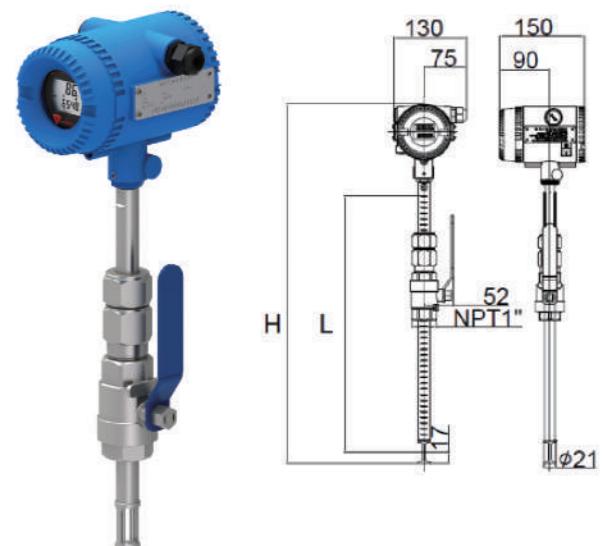

Probe	H	L
290 mm	433.5 mm	255.5 mm
440 mm	583.5 mm	405.5 mm
690 mm	833.5 mm	655.5 mm
1000 mm	1143.5 mm	965.5 mm
1500 mm	1643.6 mm	1465.5 mm

Max pipe size that each probe can adapt to					
Probe length	290mm	440mm	690mm	1000mm	1500mm
T < 50 dgr C	DN150	DN450	DN900	DN1500	DN2500
50 °C < T < 150 °C	/	DN100	DN600	DN1200	DN2200
150 °C < T < 250 °C	/	/	DN400	DN1000	DN2000
250 °C < T < 450 °C	/	/	DN300	DN600	DN1000
T < 122 °F	6"	18"	36"	60"	100"
122 °F < T < 302 °F	/	4"	24"	48"	88"
302 °F < T < 482 °F	/	/	16"	40"	80"
482 °F < T < 842 °F	/	/	12"	24"	40"

Other process connection




Flanged insertion type

For applications with
pressure higher than
1.6MPa

Flanged type

For in-line connection, 1.6 ~ 6.3 MPa
and different flanged standard available

Dimension of Flanged type thermal mass flow meter

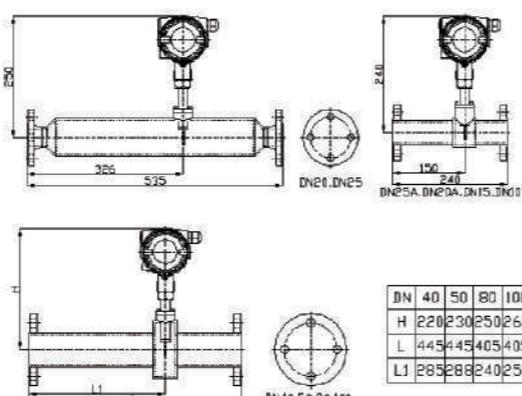

Mode number

The standard model number is usually TGF600-1-2-I2-1-N-T-M-N-1-1-XXXX, Please reference to the table below for what the model codes stand for.

Mode codes

1	General model	TGF600	Standard
	1	Air/nitrogen	Standard
2	Fluid type	2 Oxygen (sensor will be degreased)	Option
	3	Other (Please advise gas composition)	Option
	1	0.3~30 Nm/s	Option
	2	0.6~60 Nm/s	Standard
3	Measurement range	3 0.9~90 Nm/s	Option
	4	4 1.2~120 Nm/s	Option
	5	5 1.5~150 Nm/s	Option
	6	6 1.8~180 Nm/s	Option
	I1	Insertion type with 290mm probe	Option
	I2	Insertion type with 440mm probe	Standard
	I3	Insertion type with 690mm probe	Option
	I4	Insertion type with 1000mm probe	Option
	I5	Insertion type with 1500mm probe	Option
	F1	F1 Flanged insertion type up to 25 barG (362 psiG)	Option
	F2	F2 Flanged insertion type up to 40 barG (580 psiG)	Option
	F2	F2 Flanged insertion type up to 63 barG (913 psiG)	Option
4	Process connection	D1 Flanged DIN PN16 up to 16 barG (232 psiG) (DN15~DN300)	Option
	D2	D2 Flanged DIN PN25 up to 25 barG (362 psiG) (DN15~DN300)	Option
	D3	D3 Flanged DIN PN40 up to 40 barG (580 psiG) (DN15~DN300)	Option
	D4	D4 Flanged DIN PN63 up to 63 barG (913 psiG) (DN15~DN300)	Option
	C1	C1 Flanged ANSI CL150 up to 16 barG (232 psiG) (0.5 inch~12 inch)	Option
	C2	C2 Flanged ANSI CL300 up to 40 barG (580 psiG) (0.5 inch~12 inch)	Option
	C3	C3 Flanged ANSI CL400 up to 63 barG (913 psiG) (0.5 inch~12 inch)	Option
	J1	J1 JIS 10K up to 16 barG (232 psiG) (DN15~DN300)	Option
	J2	J2 JIS 20K up to 40 barG (580 psiG) (DN15~DN300)	Option
	J3	J3 JIS 30K up to 63 barG (913 psiG) (DN15~DN300)	Option
5	Wet part material	1 316ss sensor with 304ss wet parts	Standard
	2	2 316ss sensor with 316ss wet parts	Option

6	Medium temp range	N	< 150°C	Standard
		Q	< 250°C	Option
		H	< 450°C (please select remote display also)	Option
7	Transmitter	T	Integral	Standard
		R	Remote	Option
8	Cable grinder	M	M20 x 1.5	Standard
		N	NPT 1/2	Option
9	Ex-proof	N	No Ex-proof	Standard
		1	Ex db IIC T1...T6 Gb	Option
10	Transmitter	1	pulse/frequency + 4~20mA + RS485 + Bluetooth	Standard
		2	pulse/frequency + 4~20mA@HART + Bluetooth	Option
11	Power supply	1	13.5~42VDC	Standard
		2	13.5~42VDC with 85~265VAC 50/60Hz power converter	Option
12	Pipe size	xxxx	please use 4 digit pipe size, such as DN50=0050, DN300=0300	xxxx



TGF460 THERMAL MASS FLOW METER

Working principle

TGF460 Series Thermal Mass Flowmeter is COMATE's latest technology specially designed for air and N2 applications. It has more compact design, which means smaller enclosure and thinner insertion tube probe. It can be installed / removed without stopping the fluid, as the pipe is thinner, field engineers will be able to insert the meter to pipe very easily. Also, TGF460 will be the most cost-effect model in the market.




Special features

- Direct mass flow or normal flow measurement
- 100:1 turn down ratio in 5 ranges: 0.3~30 Nm/s, 0.6~60 Nm/s, 0.9~90Nm/s , 1.2~120Nm/s, 1.5~150Nm/s,1.8~180Nm/s
- Large LCD screen with dual-line display and 3 setting button. Easy to read or set
- Low cost economical model.
- No pressure loss, suitable for pipe in any shape with known sectional area
- Available for hot tapping installation
- High accuracy data acquisition circuit to ensure outstanding repeatability and accuracy of the flow meter
- High efficiency design of power supply, the total power consumption is only 60mA@24VDC
- 15V~32V wide voltage range input to fit in all electricity environment
- Self-diagnose function makes trouble shooting easier

Specification

Media Compatibility	Air, Nitrogen
Pipe diameter	Insertion: DN25 ~ DN400 Inline: DN25 ~ DN300
Flow velocity range	0.3 ~ 30Nm/s 0.6 ~ 60Nm/s 0.9 ~ 90Nm/s 1.2 ~ 120Nm/s 1.5 ~ 150Nm/s 1.8 ~ 180Nm/s
Accuracy	1.5% RD ± 0.5% FS
Temperature of medium	-40 ~ +150°C
Pressure of medium	Insertion: 1.6 MPa Flanged insertion: 4 MPa Flanged in-line: 4 MPa
Power supply	AC85~264V or DC16~32V
Response time	1 second
Output	Frequency and 4~20mA as standard
Communication	RS~485+Bluetooth as standard , 4~20mA@HART as optional
Date displayed	Mass flow, Total flow Volume flow in normal condition
Ingress protection grade	IP65 (GB China)
Max pipe size that each probe can adapt to	
Probe length	255mm 320mm 395mm
T < 50 dgr C	DN100 DN250 DN350
50 °C < T < 150 °C	/ / DN50
T < 122 °F	4" 10" 14"
122 °F < T < 302 °F	/ / 2"

Insertion type with ball valve
Install/remove the meter without stopping the flow

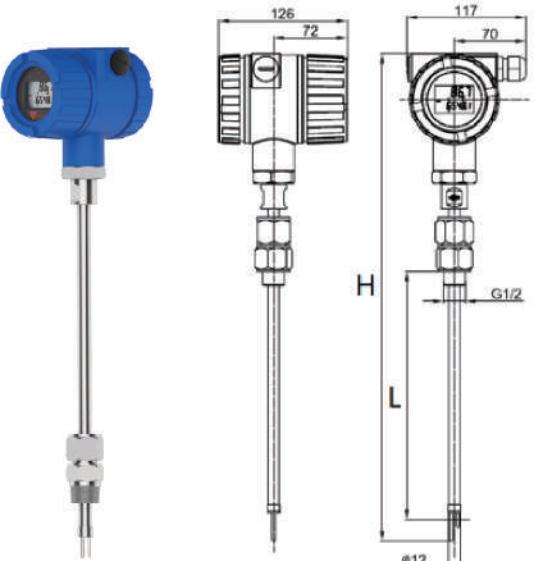

Probe	H	L
255 mm	412 mm	180 mm
320 mm	477 mm	245 mm
395 mm	552 mm	320 mm



Flanged type

Standard Volume flow rate range in popular sizes

Pipe size (mm)	Pipe size (inch)	Option 1 (0.3~30 Nm/s)		Standard (0.6~60 Nm/s)		Option 2 (0.9~90 Nm/s)	
		Min Nm³/min	Max Nm³/min	Min Nm³/min	Max Nm³/min	Min Nm³/min	Max Nm³/min
25 mm	1"	0.01	0.88	0.02	1.77	0.03	2.65
32 mm	1 1/4"	0.01	1.45	0.03	2.89	0.04	4.34
40 mm	1 1/2"	0.02	2.26	0.05	4.52	0.07	6.78
50 mm	2"	0.04	3.53	0.07	7.06	0.11	10.59
65 mm	2 1/2"	0.06	5.97	0.12	11.94	0.18	17.90
80 mm	3"	0.09	9.04	0.18	18.08	0.27	27.12
100 mm	4"	0.14	14.12	0.28	28.25	0.42	42.37
125 mm	5"	0.22	22.07	0.44	44.14	0.66	66.21
150 mm	6"	0.32	31.78	0.64	63.56	0.95	95.34
200 mm	8"	0.56	56.50	1.13	112.99	1.69	169.49
250 mm	10"	0.88	88.28	1.77	176.55	2.65	264.83
300 mm	12"	1.27	127.12	2.54	254.24	3.81	381.36

Pipe size (mm)	Pipe size (inch)	Option 3 (1.2~120 Nm/s)		Option 4 (1.5~150 Nm/s)		Option 5 (1.8~180 Nm/s)	
		Min Nm³/min	Max Nm³/min	Min Nm³/min	Max Nm³/min	Min Nm³/min	Max Nm³/min
25 mm	1"	0.04	3.53	0.04	4.41	0.05	5.30
32 mm	1 1/4"	0.06	5.79	0.07	7.23	0.09	8.68
40 mm	1 1/2"	0.09	9.04	0.11	11.30	0.14	13.56
50 mm	2"	0.14	14.12	0.18	17.66	0.21	21.19
65 mm	2 1/2"	0.24	23.87	0.30	29.84	0.36	35.81
80 mm	3"	0.36	36.16	0.45	45.20	0.54	54.24
100 mm	4"	0.56	56.50	0.71	70.62	0.85	84.75
125 mm	5"	0.88	88.28	1.10	110.35	1.32	132.42
150 mm	6"	1.27	127.12	1.59	158.90	1.91	190.68
200 mm	8"	2.26	225.99	2.82	282.49	3.39	338.98
250 mm	10"	3.53	353.11	4.41	441.38	5.30	529.66
300 mm	12"	5.08	508.47	6.36	635.59	7.63	762.71

If with remote display, there is no difference on max pipe size in different temperature

Mode number

The standard model number is usually TGF460-2-I1-1-T-M-1-1-XXXX,
Please reference to the table below for what the model codes stand for.

Mode codes

1	General model	TGF460	Standard
1		0.3 ~ 30 Nm/s	Option
2		0.6 ~ 60Nm/s	Standard
3		0.9 ~ 90Nm/s	Option
2	Measurement range	4	1.2 ~ 120Nm/s
		5	1.5 ~ 150Nm/s
		6	1.8 ~ 180Nm/s
	I1	Insertion type with 255mm probe	Standard
	I2	Insertion type with 320mm probe	Option
	I3	Insertion type with 395mm probe	Option
	F1	Flanged insertion type up to 25 barG (362 psiG)	Option
	D1	Flanged DIN PN16 up to 16 barG (232 psiG) (DN15~DN300)	Option
	D2	Flanged DIN PN25 up to 25 barG (362 psiG) (DN15~DN300)	Option
	D3	Flanged DIN PN40 up to 40 barG (580 psiG) (DN15~DN300)	Option
3	Process connection	C1	Flanged ANSI CL150 up to 16 barG (232 psiG) (0.5 inch~12 inch)
	C2	Flanged ANSI CL300 up to 40 barG (580 psiG) (0.5 inch~12 inch)	Option
	J1	JIS 10K up to 16 barG (232 psiG) (DN15~DN300)	Option
	J2	JIS 20K up to 40 barG (580 psiG) (DN15~DN300)	Option
4	Wet part material	1	316ss sensor with 304ss wet parts
	2	316ss sensor with 316ss wet parts	Option
5	Transmitter	T	Integral
	R	Remote	Option
6	Cable grinder	M	M20 x 1.5
	N	NPT 1/2	Option
7	Transmitter	1	pulse/frequency + 4~20mA + RS485 + Bluetooth
	2	pulse/frequency + 4~20mA@HART + Bluetooth	Option
8	Power supply	1	13.5 ~ 42VDC
	2	13.5 ~ 42VDC with 85~265VAC 50/60Hz power converter	Option
9	Pipe size	xxxx	please use 4 digit pipe size, such as DN50=0050, DN300=0300
			xxxx

TGF200 MICRO FLOW METER

Working principle

TGF200 series micro flow meter measure dry air and nitrogen and other non-corrosive gas base on thermal mass flow measurement technology. It is designed to measure the mass and standard flow in small pipe lines in general industry and laboratory.

User can choose 4~20mA output or Modbus@RS485 to upload data to their system. TGF200 also support blue tooth communication, so users can read and set the meter on cellphone with COMATE APP.




Special features

- Thermal mass measuring technology, direct mass/standard flow measurement
- 6 digit dual line LED screen
- Low cost economical model
- Blue tooth for operating on cellphone
- 1.5% reading + 0.3% full scale accuracy in 100:1 measurement range
- 1/4" ~ 1" (8mm~25mm) small pipe line measurement
- On-line diagnose available
- Require only 3D upstream and 2D downstream straight pipe run


Pipe size (mm)	Pipe size (inch)	Standard (0.3~30 Nm/s)		Standard (0.6~60 Nm/s)		Option 1 (0.9~90 Nm/s)	
		Min (NL/min)	Max (NL/min)	Min (NL/min)	Max (NL/min)	Min (NL/min)	Max (NL/min)
8 mm	1/4"	0.9	90	1.8	180	2.7	270
10 mm	3/8"	1.4	140	2.8	280	4.2	420
15 mm	1/2"	3.2	320	6.4	640	9.5	950
20 mm	3/4"	5.6	560	11.3	1130	16.9	1690
25 mm	1"	8.8	880	17.7	1170	26.5	2650

Specification

Fluid Compatibility	Air, Nitrogen and other non-corrosive fluid
Pipe diameter	8mm~25mm (1/4" ~ 1")
Flow velocity range	0.3 ~ 30 Nm/s or 0.6~60 Nm/s or 0.9 ~ 90 Nm/s
Accuracy	1.5% of reading + 0.3% of full scale
Repeatability	0.3% of reading
Storage Temperature	-20 ~ +50°C
Fluid Temperature	-20 ~ +100°C
Pressure rating	1.6 MPa
Power supply	10 ~ 35 VDC / 200 mA
Response time	160 millisecond
Output	Frequency (4~20 mA optional)
Communication	RS~485, Bluetooth
Date displayed	Mass flow, Normal flow Total flow
Housing	Aluminum alloy, IP54
Wet part material	Aluminum alloy

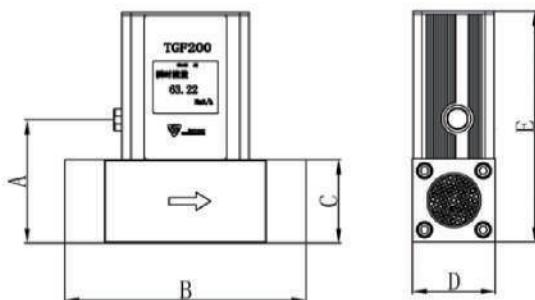

Pipe size	A	B	C	D	E
8 mm	60	144	38	38	119.5
10 mm	60	144	38	38	119.5
15 mm	60	179	38	38	119.5
20 mm	68	230	46	46	127.5
25 mm	68	230	46	46	127.5

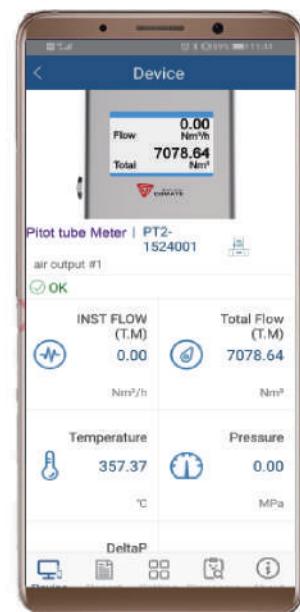

Operation on cellphone



- Reading
- Setting
- Remote diagnose

Mode number

The standard model number is usually TGF200-2-A-XXX,
Please reference to the table below for what the model codes stand for.

Mode codes

1	Model	TGF200	Basic Model
2	Flow range	1	0.3 ~ 30 Nm/s Optional
3	Output	2	0.6 ~ 60 Nm/s Standard
4	Connection	3	0.9 ~ 90 Nm/s Optional
5	Pipe size	A	frequency, RS485, blue tooth Standard
		B	frequency, 4~20mA, RS485, blue tooth Optional
		G	G thread female
		08	DN8 (1/4")
		10	DN10 (3/8")
		15	DN15 (1/2")
		20	DN20 (3/4")
		25	DN25 (1")

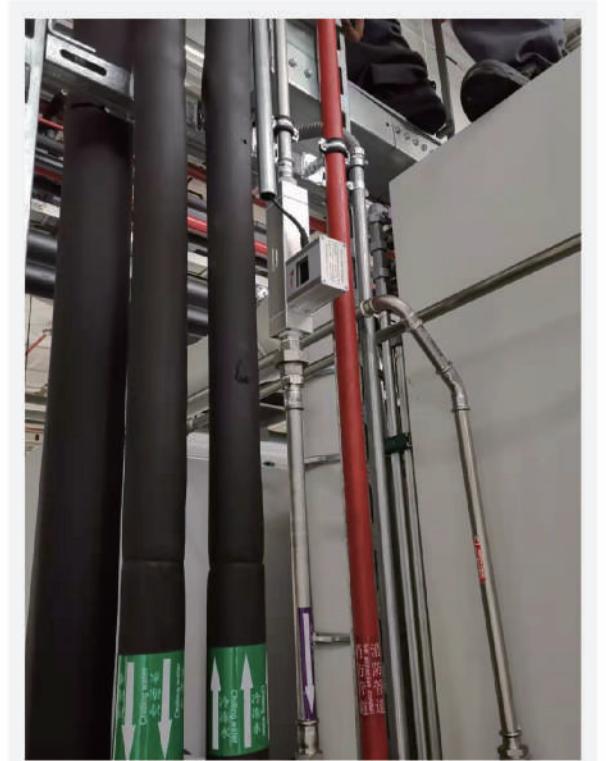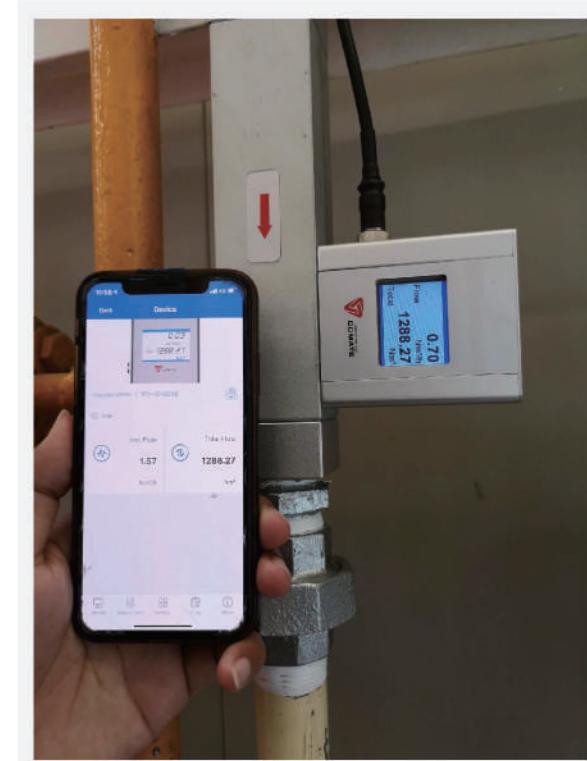


PTF520 PITOT TUBE FLOW METER

Working principle


PTF520 Pitot tube flow meter is COMATE's latest technology base on different pressure technology specially designed for compressed air applications. As it has 1/2" insertion connection probe and compact designed sensor , it can be used on pipes from DN25~DN300. In some higher pressure applications, it can be installed / removed without stopping the fluid, as the pipe is thinner, field engineers will be able to insert the meter to pipe very easily. Also, due to its working principle, it is less effected by the water contents in the compressed air.

PTF520 Pitot tube flow meter also has integral temperature and pressure compensation, so it can measure standard flow, temperature and pressure also.

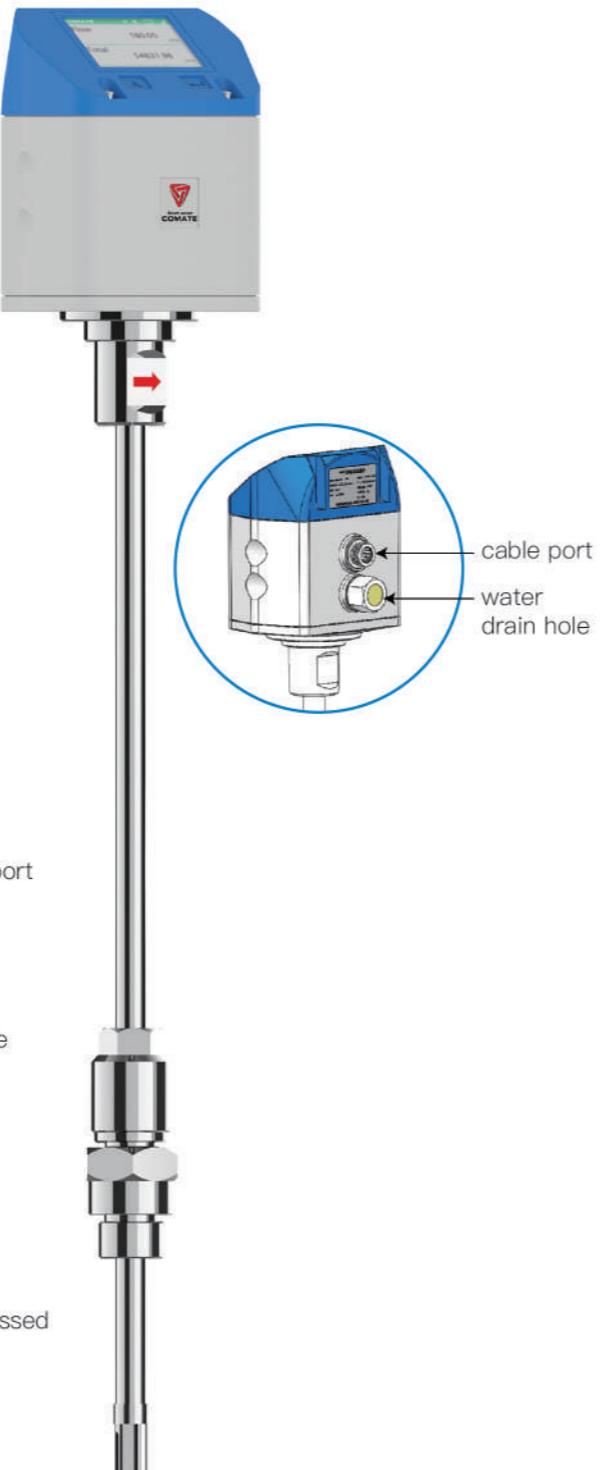

Specification


Medium	Air and none-corrosive gas
Enclosure	Nylon
Pipe size range	1"~12" (DN25~DN300)
Ambient temperature	-20~60°C
Atmosphere pressure	86~106 Kpa
Ambient humidity	5~100%
Process connection	1/2 G insertion with ball valve
Pressure rating	10 barG
Fluid temperature	-40~ 150°C
Wet part material	304ss
Parameter measured	Flow rate, temperature , pressure
Power	13.5~32V DC,150mA max
Analog	4 wire passive 4~20mA
Communication	RS485@Modbus-RTU, blue tooth
Flow Accuracy	±1.5%RD±0.3%FS
Flow Repeatability	±0.5%RD
Response time	1 second

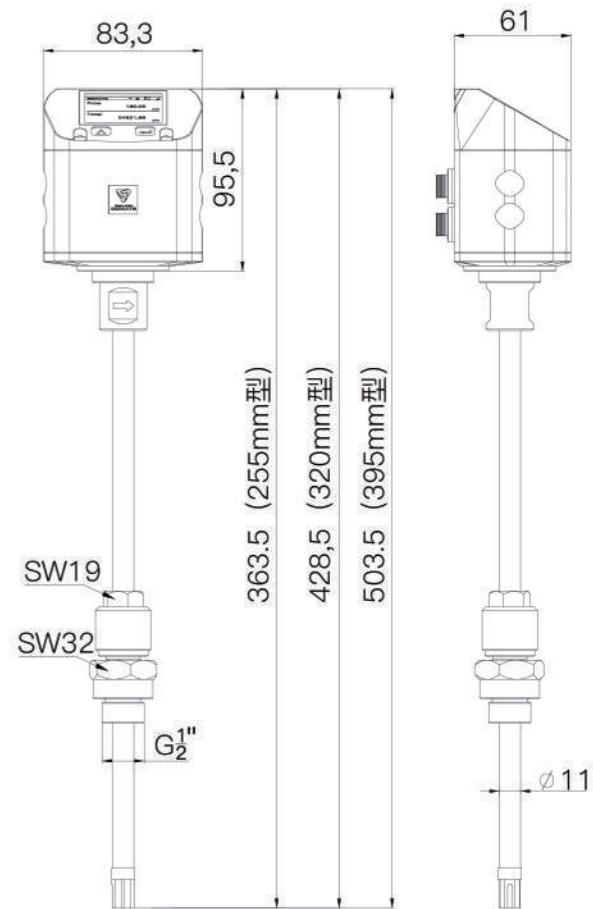

Standard flow range for compressed air @ 50 °C and different pressure, unit is Normal flow Nm³/min ref to 1.01325 barA, 0 °C



Pipe inner diameter			0 Bar G		4 Bar G		6 Bar G		7 Bar G		8 Bar G	
DN	mm	inch	Min	Max								
DN25	27.3	1"	0.19	1.93	0.43	4.29	0.51	5.08	0.54	5.43	0.58	5.76
DN32	36	1 1/4"	0.34	3.36	0.75	7.47	0.88	8.83	0.94	9.44	1.00	10.01
DN40	41.9	1 1/2"	0.45	4.55	1.01	10.11	1.20	11.96	1.28	12.79	1.36	13.56
DN50	53.1	2"	0.73	7.30	1.62	16.24	1.92	19.21	2.05	20.53	2.18	21.78
DN65	68.9	2 1/2"	1.23	12.29	2.73	27.34	3.23	32.34	3.46	34.57	3.67	36.66
DN80	80.9	3"	1.69	16.95	3.77	37.70	4.46	44.59	4.77	47.66	5.05	50.55
DN100	110	4"	3.13	31.33	6.97	69.70	8.24	82.44	8.81	88.12	9.35	93.45
DN125	133.7	5"	4.63	46.29	10.30	102.97	12.18	121.78	13.02	130.18	13.81	138.06
DN150	159.3	6"	6.57	65.71	14.62	146.17	17.29	172.89	18.48	184.80	19.60	195.99
DN200	200	8"	10.36	103.58	23.04	230.40	27.25	272.52	29.13	291.30	30.89	308.94
DN250	250	10"	16.18	161.85	36.00	360.01	42.58	425.80	45.52	455.15	48.27	482.72
DN300	300	12"	23.31	233.06	51.84	518.41	61.32	613.16	65.54	655.42	69.51	695.11

Socket tube (Material according to pipeline)



Read & Set on Screen

PTF520 has integral TFT 2" High Resolution display with two capacitive key for setting

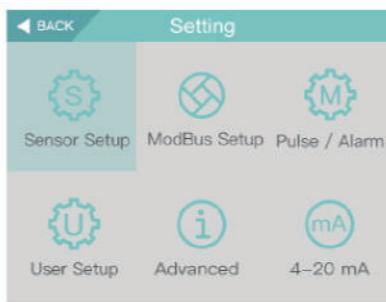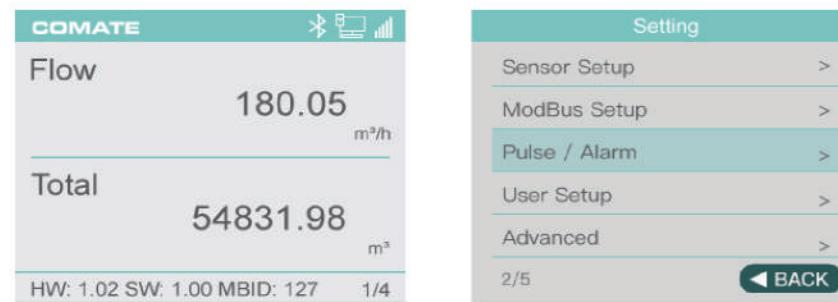


Read & Set on in COMATE APP

Instead of traditional keyboard, COMATE PTF500 implement a cellphone setting system. All PTF500 have Bluetooth communication. Users can install COMATE APP on their cellphone or tablet and use the APP to connect with a PTF500 flow meter to read or set the flow meter.

This APP also support a remote diagnose function. Whenever there is anything wrong with the flow meter, customer can ask for a remote diagnose support. When this function is working, COMATE engineer back in office can remotely check the setting of the meter, and the signal of sensor, to provide users with most accurate trouble shooting advise.

COMATE APP has made the using of the product simple and efficient .

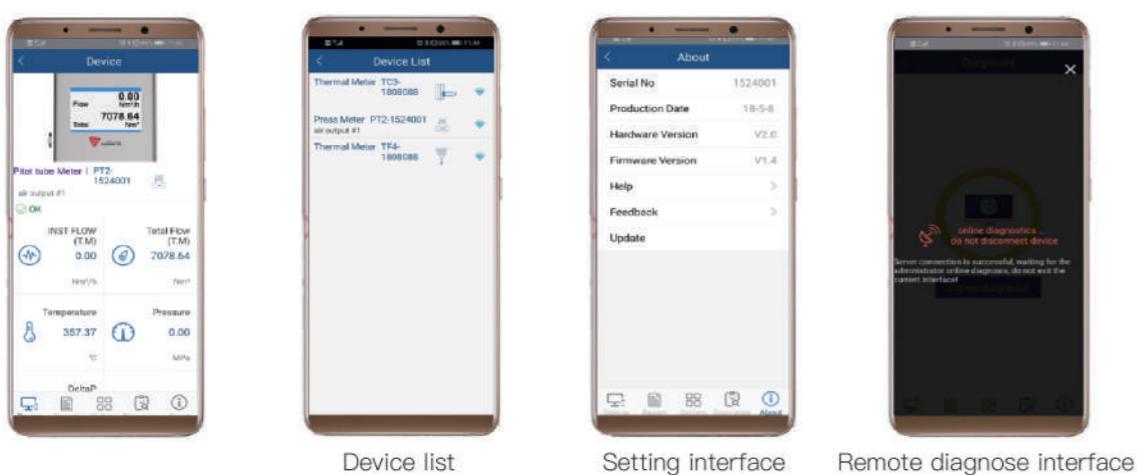

Mode number

The standard model number is usually PTF520-I1-T-1-1-XXXX, Please reference to the table below for what the model codes stand for.

Mode codes

1 General model	D	Insertion (G 1/2) ,anti-ejection design with ball valve	Standard
1	1	255mm, 11mm dia (1"~4" or DN25~DN100)	Option
2 Probe Length	2	320mm, 11mm dia (1"~8" or DN25~DN200)	Option
3	3	395mm, 11mm dia (1"~12" or DN25~DN300)	Standard
3 Probe Material	1	304 SS	Standard
	1	Carbon steel	Option
4 Socket material	2	304 SS	Standard
	3	316 SS	Option
5 Transmitter	T	Integral	Standard
6 Pressure Rating	1	10 Bar G	Standard
	2	150 KpaA	Option
7 Display and output	1	Local display, RS485, Bluetooth	Standard
	2	Local display, 4wire 4~20mA, RS485, Bluetooth	Option
8 Power supply	1	13.5~42VDC	Standard
	N	13.5~42VDC with 24VDC to AC power converter	N
9 Pipe size	XXX	please use 3 digit pipe size, such as DN50=050, DN200=200	XXX

Remark:

1. Hot-tap hole opener are as accessories, please remark if you need any of them
2. Please indicate flow rate along with the model number selected
3. If anything beyond this chart, please check with us to see the availability
4. The model selected in 1st line is the standard configuration with no accessories

PTF600 PITOT TUBE FLOW METER

Working principle

PTF600 Pitot tube flow meter is COMATE's heavy duty designed flow meter for wet and dry air. It has a wide turn down DP transmitter which ensures it a 33:1 wide measurement range and better stability. It has a unique water-proof design which can solve the problem that caused by condensing water in capillary.

PTF600 Pitot tube flow meter also has integral temperature and pressure compensation, so it can measure standard flow, temperature and pressure also.



Special features

- Cellphone APP for reading and setting
- Self-diagnose and remote diagnose function to provide with best support
- For both dry and wet air measurement, possible for measuring compressed air at output of compressor
- Multi-variable flow meter, measures flow rate, temperature, pressure, FAD measurement available
- Super wide turn down of 33:1, best in market
- Fast response time
- No mechanical wear part
- Insertion mounting, available for hot tapping.
- Special water proof design, no worry about condensing water blocking the capillary
- Heavy duty design, more durable in tough measurement environment

Standard flow range for compressed air @ 50 °C and different pressure, unit is Normal flow Nm³/min ref to 1.01325 barA, 0 °C

Pipe inner diameter	2 Bar G		3 Bar G		4 Bar G		5 Bar G		6 Bar G			
	DN	mm	inch	Min	Max	Min	Max	Min	Max	Min	Max	
DN25	27.3	1"	0.13	4.28	0.15	4.79	0.16	5.24	0.18	5.66	0.19	6.05
DN32	36	1 1/4"	0.23	7.45	0.26	8.33	0.28	9.12	0.31	9.85	0.33	10.53
DN40	41.9	1 1/2"	0.31	10.09	0.35	11.28	0.38	12.35	0.41	13.34	0.44	14.26
DN50	53.1	2"	0.50	16.21	0.56	18.11	0.62	19.84	0.67	21.43	0.71	22.90
DN65	68.9	2 1/2"	0.85	27.29	0.95	30.50	1.04	33.40	1.12	36.07	1.20	38.56
DN80	80.9	3"	1.17	37.62	1.31	42.05	1.43	46.05	1.54	49.73	1.65	53.16
DN100	110	4"	2.16	69.55	2.41	77.74	2.64	85.14	2.86	91.94	3.05	98.28
DN125	133.7	5"	3.19	102.75	3.57	114.84	3.91	125.78	4.22	135.83	4.51	145.19
DN150	159.3	6"	4.53	145.87	5.06	163.03	5.55	178.55	5.99	192.83	6.40	206.12
DN200	200	8"	7.14	229.93	7.98	256.98	8.74	281.45	9.44	303.95	10.09	324.90
DN250	250	10"	11.16	359.26	12.47	401.53	13.66	439.76	14.75	474.92	15.77	507.65
DN300	300	12"	16.07	517.33	17.96	578.21	19.67	633.25	21.24	683.89	22.70	731.02

Standard flow range for compressed air @ 50 °C and different pressure, unit is Normal flow Nm³/min ref to 1.01325 barA, 0 °C



Pipe inner diameter	7 Bar G		8 Bar G		9 Bar G		10 Bar G		12 Bar G			
	DN	mm	inch	Min	Max	Min	Max	Min	Max	Min	Max	
DN25	27.3	1"	0.20	6.42	0.21	6.77	0.22	7.10	0.23	7.41	0.25	8.01
DN32	36	1 1/4"	0.35	11.16	0.37	11.77	0.38	12.34	0.40	12.89	0.43	13.92
DN40	41.9	1 1/2"	0.47	15.12	0.50	15.94	0.52	16.72	0.54	17.46	0.59	18.86
DN50	53.1	2"	0.75	24.29	0.80	25.60	0.83	26.85	0.87	28.04	0.94	30.29
DN65	68.9	2 1/2"	1.27	40.89	1.34	43.10	1.40	45.20	1.47	47.21	1.58	50.99
DN80	80.9	3"	1.75	56.38	1.85	59.42	1.94	62.32	2.02	65.09	2.18	70.30
DN100	110	4"	3.24	104.23	3.41	109.86	3.58	115.22	3.74	120.34	4.04	129.97
DN125	133.7	5"	4.78	153.99	5.04	162.30	5.29	170.22	5.52	177.78	5.96	192.01
DN150	159.3	6"	6.79	218.60	7.16	230.41	7.51	241.64	7.84	252.37	8.47	272.57
DN200	200	8"	10.70	344.57	11.28	363.19	11.83	380.89	12.36	397.81	13.34	429.65
DN250	250	10"	16.72	538.40	17.62	567.48	18.48	595.14	19.31	621.57	20.85	671.32
DN300	300	12"	24.08	775.29	25.38	817.17	26.62	857.00	27.80	895.06	30.02	966.70

Specification

Media Compatibility	Dry and wet air
Pipe diameter	Insertion type: DN25~400mm Inline type: DN15~300mm
Different pressure range	6~6220 Pa, please reference to next subject on how to calculate flow rate range
Accuracy	1% RD+ ±0.5% FS
Temperature of medium	-25 ~ +120°C
Pressure of medium	Insertion type :16 barG Inline type : 4 MPa
Power supply	DC 15~32V (AC85~264V power converter available)
Response time	1 second
Output / Communication	RS485, Bluetooth (4~20mA optional)
Date displayed	Mass flow, Volume flow in normal condition, Total flow, Temperature of medium. Velocity
Ingress protection grade	IP65 (GB China)

Operation on cellphone

- Reading
- Setting
- 0 point reset
- Remote diagnose

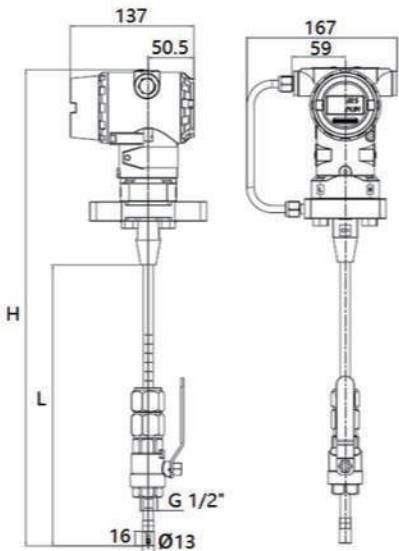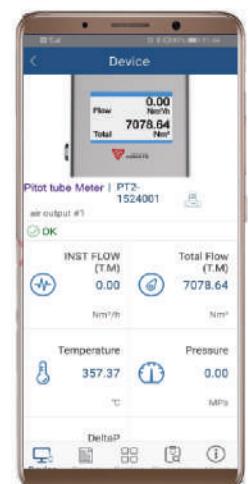

Probe	H	L	Pipe size available
255 mm	460 mm	245 mm	DN150
320 mm	525 mm	310 mm	DN250
395 mm	600 mm	385 mm	DN400

Mode number

The standard model number is usually PTF600-I1-T-1-1-XXXX, Please reference to the table below for what the model codes stand for.

Mode codes

1	General model	PTF600	Standard
		I1 Insertion type with 255mm probe	Standard
2	Process connection	I2 Insertion type with 320mm probe	Option
		I3 Insertion type with 395mm probe	Option
F1		Flanged insertion type up to 25 barG (362 psiG)	Option
		F2 Flanged insertion type up to 40 barG (580 psiG)	Option
D1		D1 Flanged DIN PN16 up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
		D2 Flanged DIN PN25 up to 25 barG (362 psiG) (DN15 ~ DN300)	Option
D3		D3 Flanged DIN PN40 up to 40 barG (580 psiG) (DN15 ~ DN300)	Option
		C1 Flanged ANSI CL150 up to 16 barG (232 psiG) (0.5 inch ~ 12 inch)	Option
C2		C2 Flanged ANSI CL300 up to 40 barG (580 psiG) (0.5 inch ~ 12 inch)	Option
		J1 JIS 10K up to 16 barG (232 psiG) (DN15 ~ DN300)	Option
J2		J2 JIS 20K up to 40 barG (580 psiG) (DN15 ~ DN300)	Option
		T Integral	Standard
3	Transmitter	R Remote	Option
		1 pulse/frequency + RS485 + Bluetooth	Standard
4	Transmitter	2 pulse/frequency + 4~20mA + RS485 + Bluetooth	Option
		1 13.5 ~ 42VDC	Standard
5	Power supply	2 13.5 ~ 42VDC with 85~265VAC 50/60Hz power converter	Option
		6 Pipe size xxxx please use 4 digit pipe size, such as DN50=0050, DN300=0300	xxxx

CAE520 COMPRESSED AIR NETWORKING AUDITING SYSTEM


General

CAE520 Compressed air network auditing system is designed as a convenient and efficient method of compressor and compressed network energy efficiency measurement and monitor.

Basic CAE520 includes a PTF520 pitot tube flow meter which support hot tap installation and a IoT data logger which can upload measurement data to cloud server from 4G modular for remote monitoring anywhere in the world with internet access.

Optional parts include KW110M IoT power meter for power consumption measurement, hot tape drilling tool for installation, and clamp on socket for installation without welding.

After hardwares are installed and powered, users can log in COMATE compressor monitoring system website to review real time and historical data and download reports. It saves service provider from site visit for acquiring data storage device, and can check dynamic real time data remotely to provide service in time.

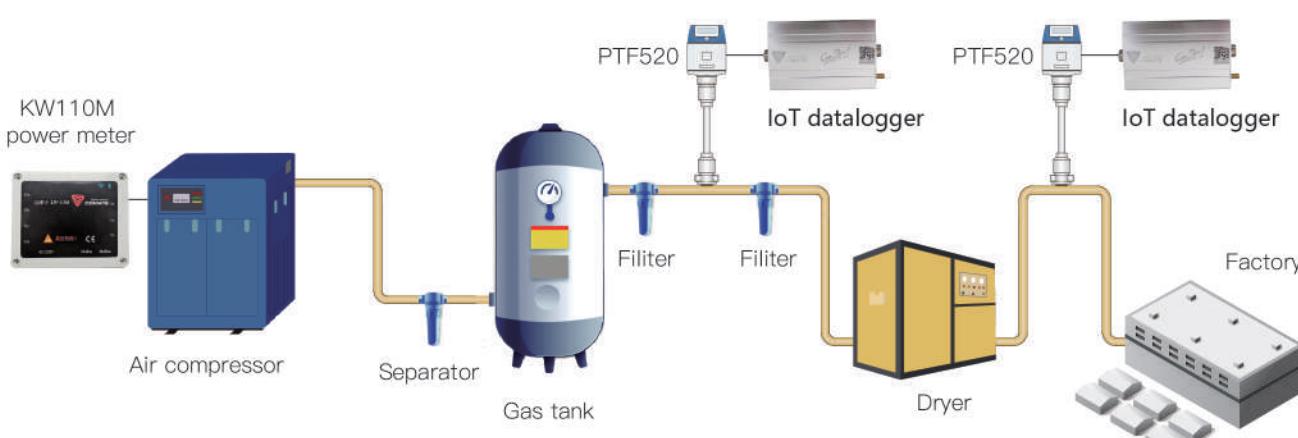

Specification

System	Power supply Ambient temperature	AC220V +/-5%, or AC/DC 85~265V, or AC380V±5% -40~80 dgr °C
Power meter	Wiring Voltage measurement range Voltage accuracy Current measurement range Current accuracy Power efficiency range Power efficiency accuracy	3 phase 3-wire or 3 phase 4-wires 2nd grade voltage test AC 0~400V 0.20% 2nd grade 0~5A (transformer ratio 500:5) 0.20% up to 250kW 0.50%
PTF520 flow meter	Pipe size Measurement range and accuracy Other	DN25~DN300 1.5% of reading+ 0.3% of full scale Please reference to PTF520 data

CAE520 sample report




CAE350S COMPRESSOR ANALYZING SYSTEM

Working principle

CAE350S compressor Analyzing System is Comate Intelligent Sensor's latest solution specially designed for analyzing the performance of compressor. The system integrated flow meter (humidity sensor built inside), pressure sensor, power meter through pad APP and Bluetooth communication technology. Users will be able to read not only the standard flow rate, FAD flow rate, pressure, power consumption and efficiency, but also load/off loading times, unit power (power consumption per unit of compressed air), and power ratio (power efficiency under a certain productivity of compressed air).

TGF350S flow meter,
receiver data from
power meter and transfer
all data to cell phone
through bluetooth

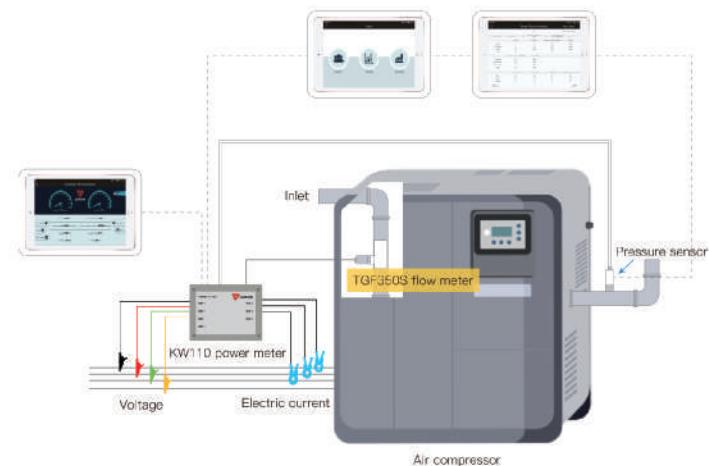

CAE350S do not have traditional display and setting system. To read or set the system, customer only need to use an PAD installed COMATE APP. All the hardware ingredients in the system will transfer date to TGF350 flow meter and the flow meter will communicate with cell phone / pad. Anyone can easily read the date or set the system. The APP can also generate an detailed report with curve diagram to help customer to understand the condition of the compressor better or even compare the tested compressor with another compressor. Thanks for the compact design of the system, users are able to bring the whole system anywhere with only a simple wheel box provided by Comate. Engineers or sales person will be able to bring only one wheel box to check the performance of most of the compressor accurately and efficiently.



Specification

System	Power supply	AC220V +/-5%, or AC/DC 85~265V, or AC380V±5%
	Ambient temperature	-40 ~ 80 dgr C
APP	For Android PAD	For PAD with resolution of 1920*1200 , Android 4.4 or higher version
Power meter	Wiring	3 phase 3-wire or 3 phase 4-wires
	Voltage measurement range	2nd grade voltage test AC 0 ~ 400V
	Voltage accuracy	0.20%
	Current measurement range	2nd grade 0~5A (transformer ratio 500:5)
	current accuracy	0.20%
	Power efficiency range	up to 250KW
	Power efficiency accuracy	0.50%
DN100 TGF350S flow meter	Inlet pipe size	DN40~DN100 (1.5" ~ 4")
	Measurement range and accuracy	2% accuracy in 0.5~35 Nm3/min (17.7~1236 SCFM)
DN200 TGF350S flow meter	Inlet pipe size	DN100~DN200 (4"~8")
	Measurement range and accuracy	2% accuracy in 2~90 Nm3/min (70.6~3178.3 SCFM)
Humidity	Accuracy	+/- 4.5 RH
Temperature	Accuracy	0.5 dgrC

System Components

1. TGF350S inlet air flow meter

TGF350S inlet air flow meter is designed base on thermal diffusion theory, can measure the mass flow rate, standard flow rate and FAD flow rate in a 70:1 range with 2% accuracy.



CAE350S system contains 2 TGF350S flow meters, one in 4 (DN100) and one in 8" (DN200). With our rubber hose (pipe size adapter), this two meters can fit in pipe size from 1.5" to 8" (DN40~DN200). TGF350S gather all the data from other components in the system through RS485 and transfer them to pad through blue tooth.


TGF350 flow meter should be installed on the inlet of the compressor, after the filters. Thus it will not be effected by the water contents, which is normally contained in the compressed air in the pressurized pipeline and will greatly effects the measurement result of traditional thermal mass flow meter. Also it will be much easier to install and remove than traditional flow meter which has to be installed on pressurized pipes.

Beside flow rate reading, TGF350S also can provide customer with RH reading and temperature for reference.

2. Power measurement components

One KW110 power meter, 3 current transformers and 4 voltage clamps are the power measurement components in CAE350S system. KW110 gather current and voltage date from the other two components through RS485 and transfer all data to TGF350 flow meter also through RS485. Also, KW110 is the only component that is needed to be plugged to a power source and it will provide power for the whole system.

The power measurement components can be used in both 3 phase 3-wire and 3 phase 4-wire power system, with 1% accuracy in a 5~500A range. All components can be read and set through cell phone / pad APP.

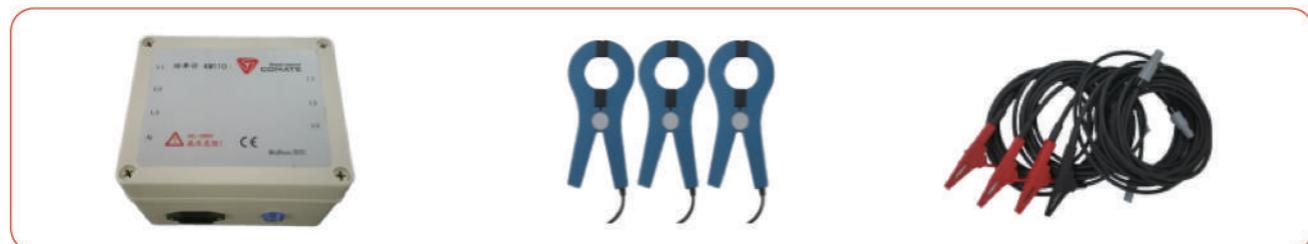

3. Pressure sensor

CAE350S system also include a pressure sensor which can be installed on the pressure tap of the compressor. The pressure sensor will output analog signal for pressure value to flow meter, so the system can compare the efficiency of the compressor under different pressure.





4. COMATE APP

Instead of traditional displaying and setting system, CAE350S system can be read and set on a PAD through blue tooth technology, by installing COMATE APP.

The setting dates are saved in flow meter separately, but all measurement dates are saved in TGF350S flow meter, which is the only component in CAE350S system that can built connection with the pad. Even when the pad is out of the range of the blue tooth of TGF350S, TGF350S itself can save 24 hours measurement date in built-in FRAM. So once a cell phone/pad connect with the system again, it can read the data of latest 24 hours.

The APP can control the start and the end of a test, when the test stop, the APP will ask if need to save the data. Once the data saved on APP, customer can check it anytime later, and generate a very detailed report with curve diagram. Customer can send the report to mailbox once connected the PAD to internet.


Through the help of Comate Flow Meter APP, customer can operate the system very easily with almost 0 training after registration and understanding some basic terms of the system.

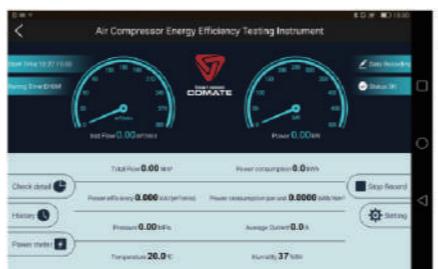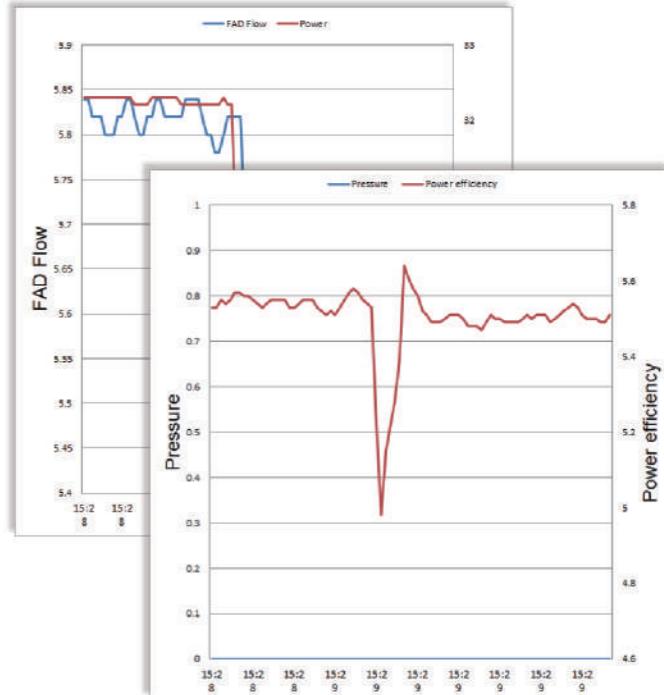

Reading interface of the APP




Setting interface of the APP

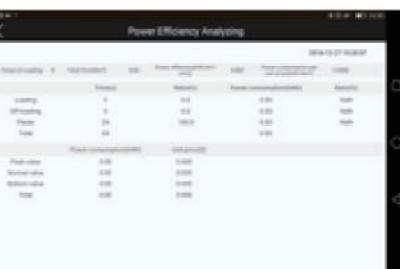

power efficiency analyzing page of the APP

5. OTHER COMPONENTS

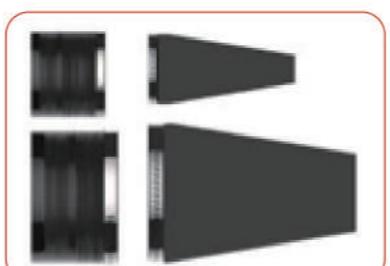

Rubber hose and pipe size adapter with screw clamps. These are for the installation of the flow meter on difference inlet pipe size



Tools set including one knife, one tape meter, one ruler, one pair of gloves and one screwdriver, for cutting rubber hose and installation of flow meter




Plastic box with wheel, holding all components inside with protection.
Tough and durable

CAE820 COMPRESSED AIR NETWORK AUDITING SYSTEM

General

CAE820 compressed Air Network Auditing System is specially designed for analyzing the performance of single compressor or compressor group. The system integrated flow meter (temperature and pressure measurement inside), power meter through tablet APP and Bluetooth communication technology. Users will be able to read not only the standard flow rate, FAD flow rate, pressure, power consumption and efficiency, but also load/off loading times, unit power (power consumption per unit of compressed air), and power ratio (power efficiency under a certain productivity of compressed air).

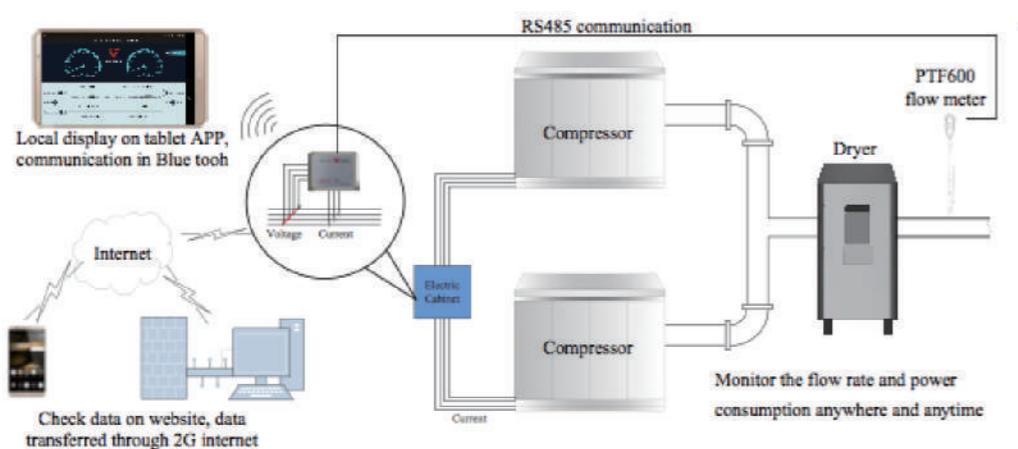

CAE820 do not rely on traditional display and setting system. To read or set the system, customer only need to use an tablet installed COMATE APP. All the hardware ingredients in the system will transfer date to flow meter and the flow meter will communicate with cell phone / pad. Anyone can easily read the date or set the system. The APP can also generate an detailed report with curve diagram to help customer to understand the condition of the compressor better or even compare the tested compressor with another compressor. The power meter can also upload the measurement data to COMATE compressor monitoring system website. So if the audit take long time, customer do not have to stay at site, but can check the data anywhere by logging the website.

Specification

System	Power supply	AC220V +/-5%, or AC/DC 85~265V, or AC380V ± 5%
	Ambient temperature	-40~80 dgr C
Power meter	Wiring	3 phase 3-wire or 3 phase 4-wires
	Voltage measurement range	2nd grade voltage test AC 0~400V
	Voltage accuracy	0.20%
	Current measurement range	2nd grade 0~5A (transformer ratio 500:5)
	current accuracy	0.20%
	Power efficiency range	up to 250KW
	Power efficiency accuracy	0.50%
PTF600 flow meter	Pipe size	DN25 ~ DN400
	Measurement range and accuracy	1% RD + 0.5%FS in 1:32 flow range

System Components

1. PTF600 pitot tube flow meter set

CAE820 has one PTF600 pitot pipe flow meter. PTF600 is COMATE'S latest compressed air flow meter base on different pressure principle designed for both dry and wet air. PTF600's can measure a flow range of 32:1 with 1%RD + 0.5%FS accuracy. The min and max flow are base on the pressure and pipe size.



PTF600 should be installed on pressurized compressed air pipeline. With the hot tap drilling tools contained in the package, customer can install and remove the meter without stopping the flow. PTF600 can also measure temperature and pressure, and will communicate with the power meter. All the data will be transferred to power meter and then transferred to tablet or internet.

For detail measurement range of this flow meter, please ref to the datasheet of this product.

2. Power measurement components

One KW110M power meter, 3 current transformers and 4 voltage clamps are the power measurement components in CAE820 system. KW110M gather current and voltage date from the other two components through RS485 and flow rate, temperature, pressure data from PTF600 flow meter. It can communicate with tablet through blue tooth or update data to COMATE Compressor Monitoring System website for customer to review. The power measurement components can be used in both 3 phase 3-wire and 3 phase 4-wire power system, with 1% accuracy in a 5~500A range.



3. COMATE APP

Instead of traditional displaying and setting system, CAE820 system can be read and set on a tablet through blue tooth technology, by installing COMATE APP. The setting data and measurement data are firstly saved in KW110M separately (can save 1440 measurement point), only when customer finished a test that the meter will transfer all data to tablet and saved in tablet. Thus even when the pad is out of the range of the blue tooth of KW110M, KW110M itself can save 24 hours measurement date in built-in FRAM (set the time space between each measurement point to 1 minute). Once the tablet connect with the system again, it can read the data of latest 1440 measurement point.


The APP can control the start and the end of a test, when the test stop, the APP will ask if need to save the data. Once the data saved on APP, customer can check it anytime later, and generate a very detailed report with curve diagram. Customer can send the report to mailbox once connected the PAD to internet.

Through the help of Comate Flow Meter APP, customer can operate the system very easily with almost 0 training after registration and understanding some basic terms of the system.

4. Comate Compressor Monitoring System

Comate Compressor Monitoring System is a on-line monitoring system with a remote data server to save all data and a website to show all data.

Any COMATE flow meter or other items can upload data to the remote data server. Customer can logging the website with their unique ID and password to check current measuring data and history data. The website will also provide curve graphic of all available data for customer to compare and know the tendency. The English of this system will be on-line soon enough.

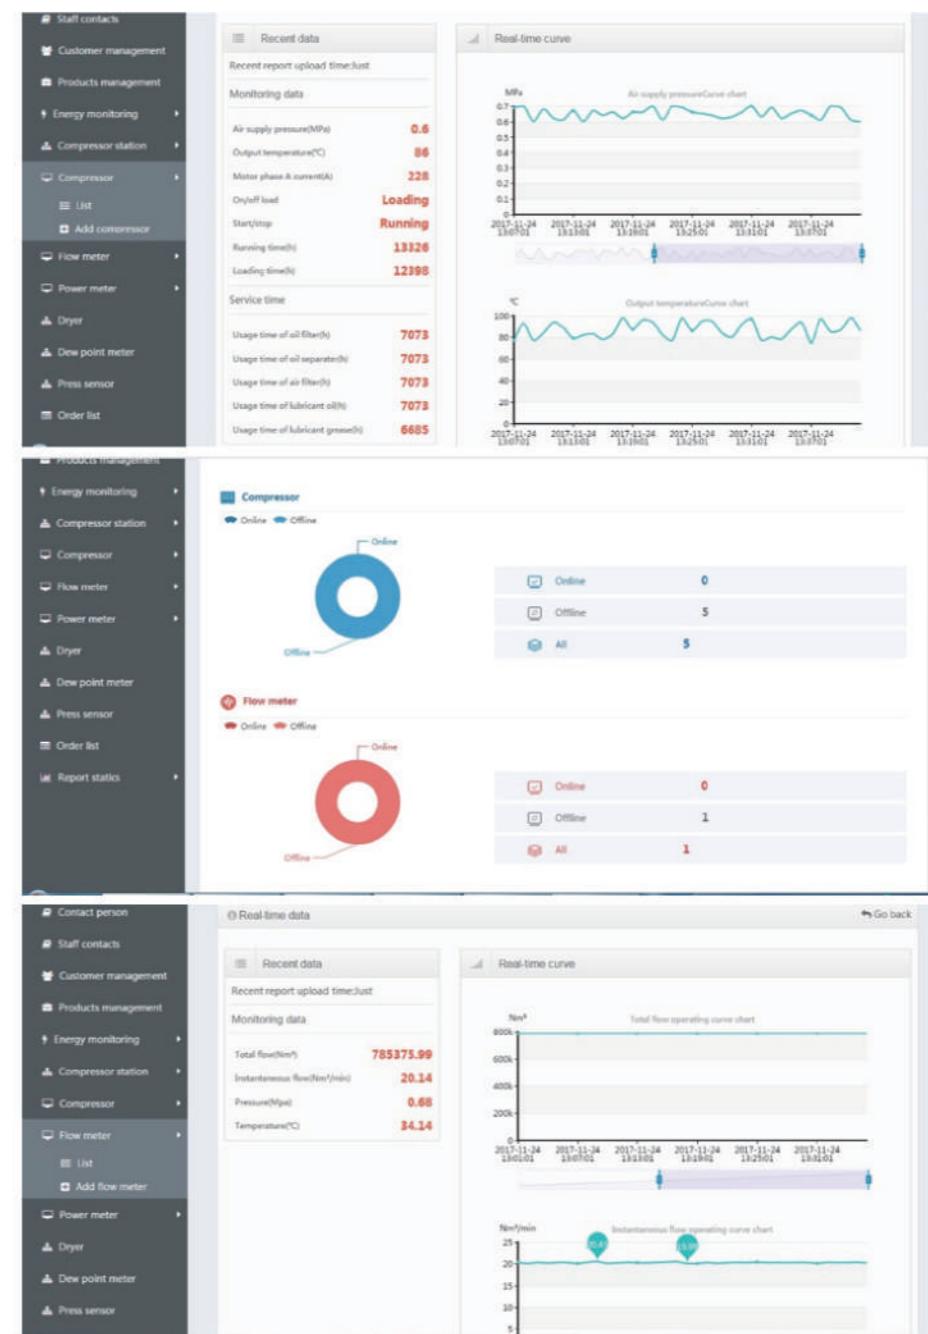


COMATE APP - SMARTPHONE OPERATION

One cellphone app FOR All COMATE flow meters

COMATE APP is specially designed user interface for flow meters from Comate Intelligent Sensor. With this application, users can connect their smart phones with the flow meters, to read, set and even remote diagnose it. It has most user friendly interface, and frees users from complicated setting list and troublesome keyboards, makes it easier to user the flow meters.

The unique Remote diagnose function saves the time and cost which happens during trouble shooting process. By some simple operations in the APP, users can upload the setting list and sensor signal to the cloud server of COMATE. Qualified engineers from COMATE will check them and give most proper trouble shooting suggestion. This is a revolutionary innovation for field instruments supporting, that can brings the best experience to users.

COMATE APP is universal for all COMATE INTELIIGENT SENSOR flow meter lines. Customer can download the android version on Google Play or IOS version on Appstore.

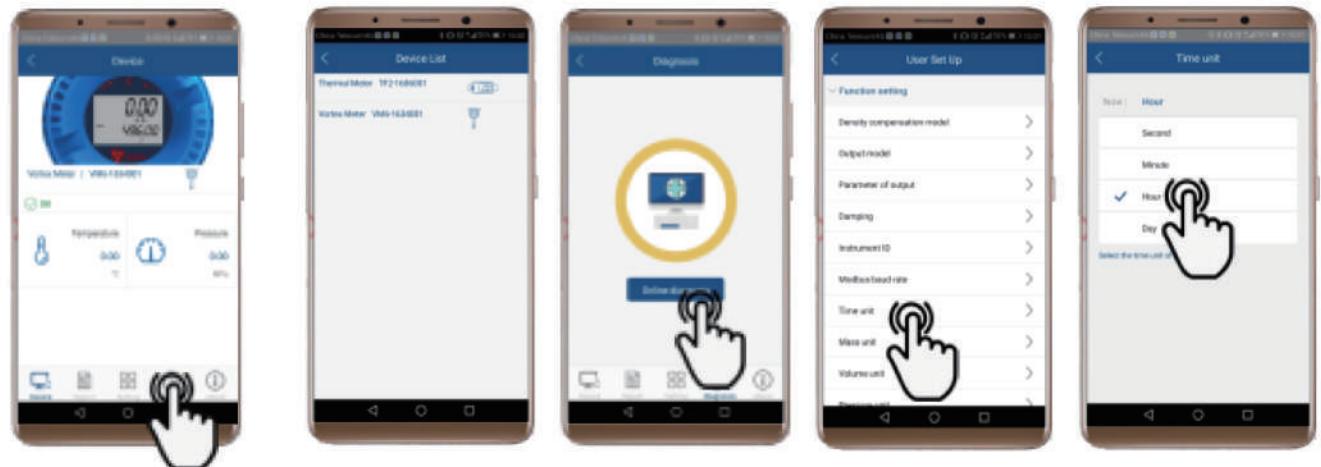

Search for COMATE flow meterst

Remote diagnose

Setting list

Set everything easily

COMATE REMOTE SUPPORT PACKAGE

Support on your measurement issues remotely

Customer relationship is important ! Good support tighten your bond with your customers.



Endless site travel



Shipping here and backcause time and cost waste



Complicated setting check



Troublesome misunderstanding in communication